


SICILY GROUP-AMOCO  
 LINE ZC-144B  
 SP 405-275

SOUTHEAST

1 KM

LINE ZC-144B

SHOTPOINTS 405-275  
 PROJECT SICILY GROUP-AMOCO

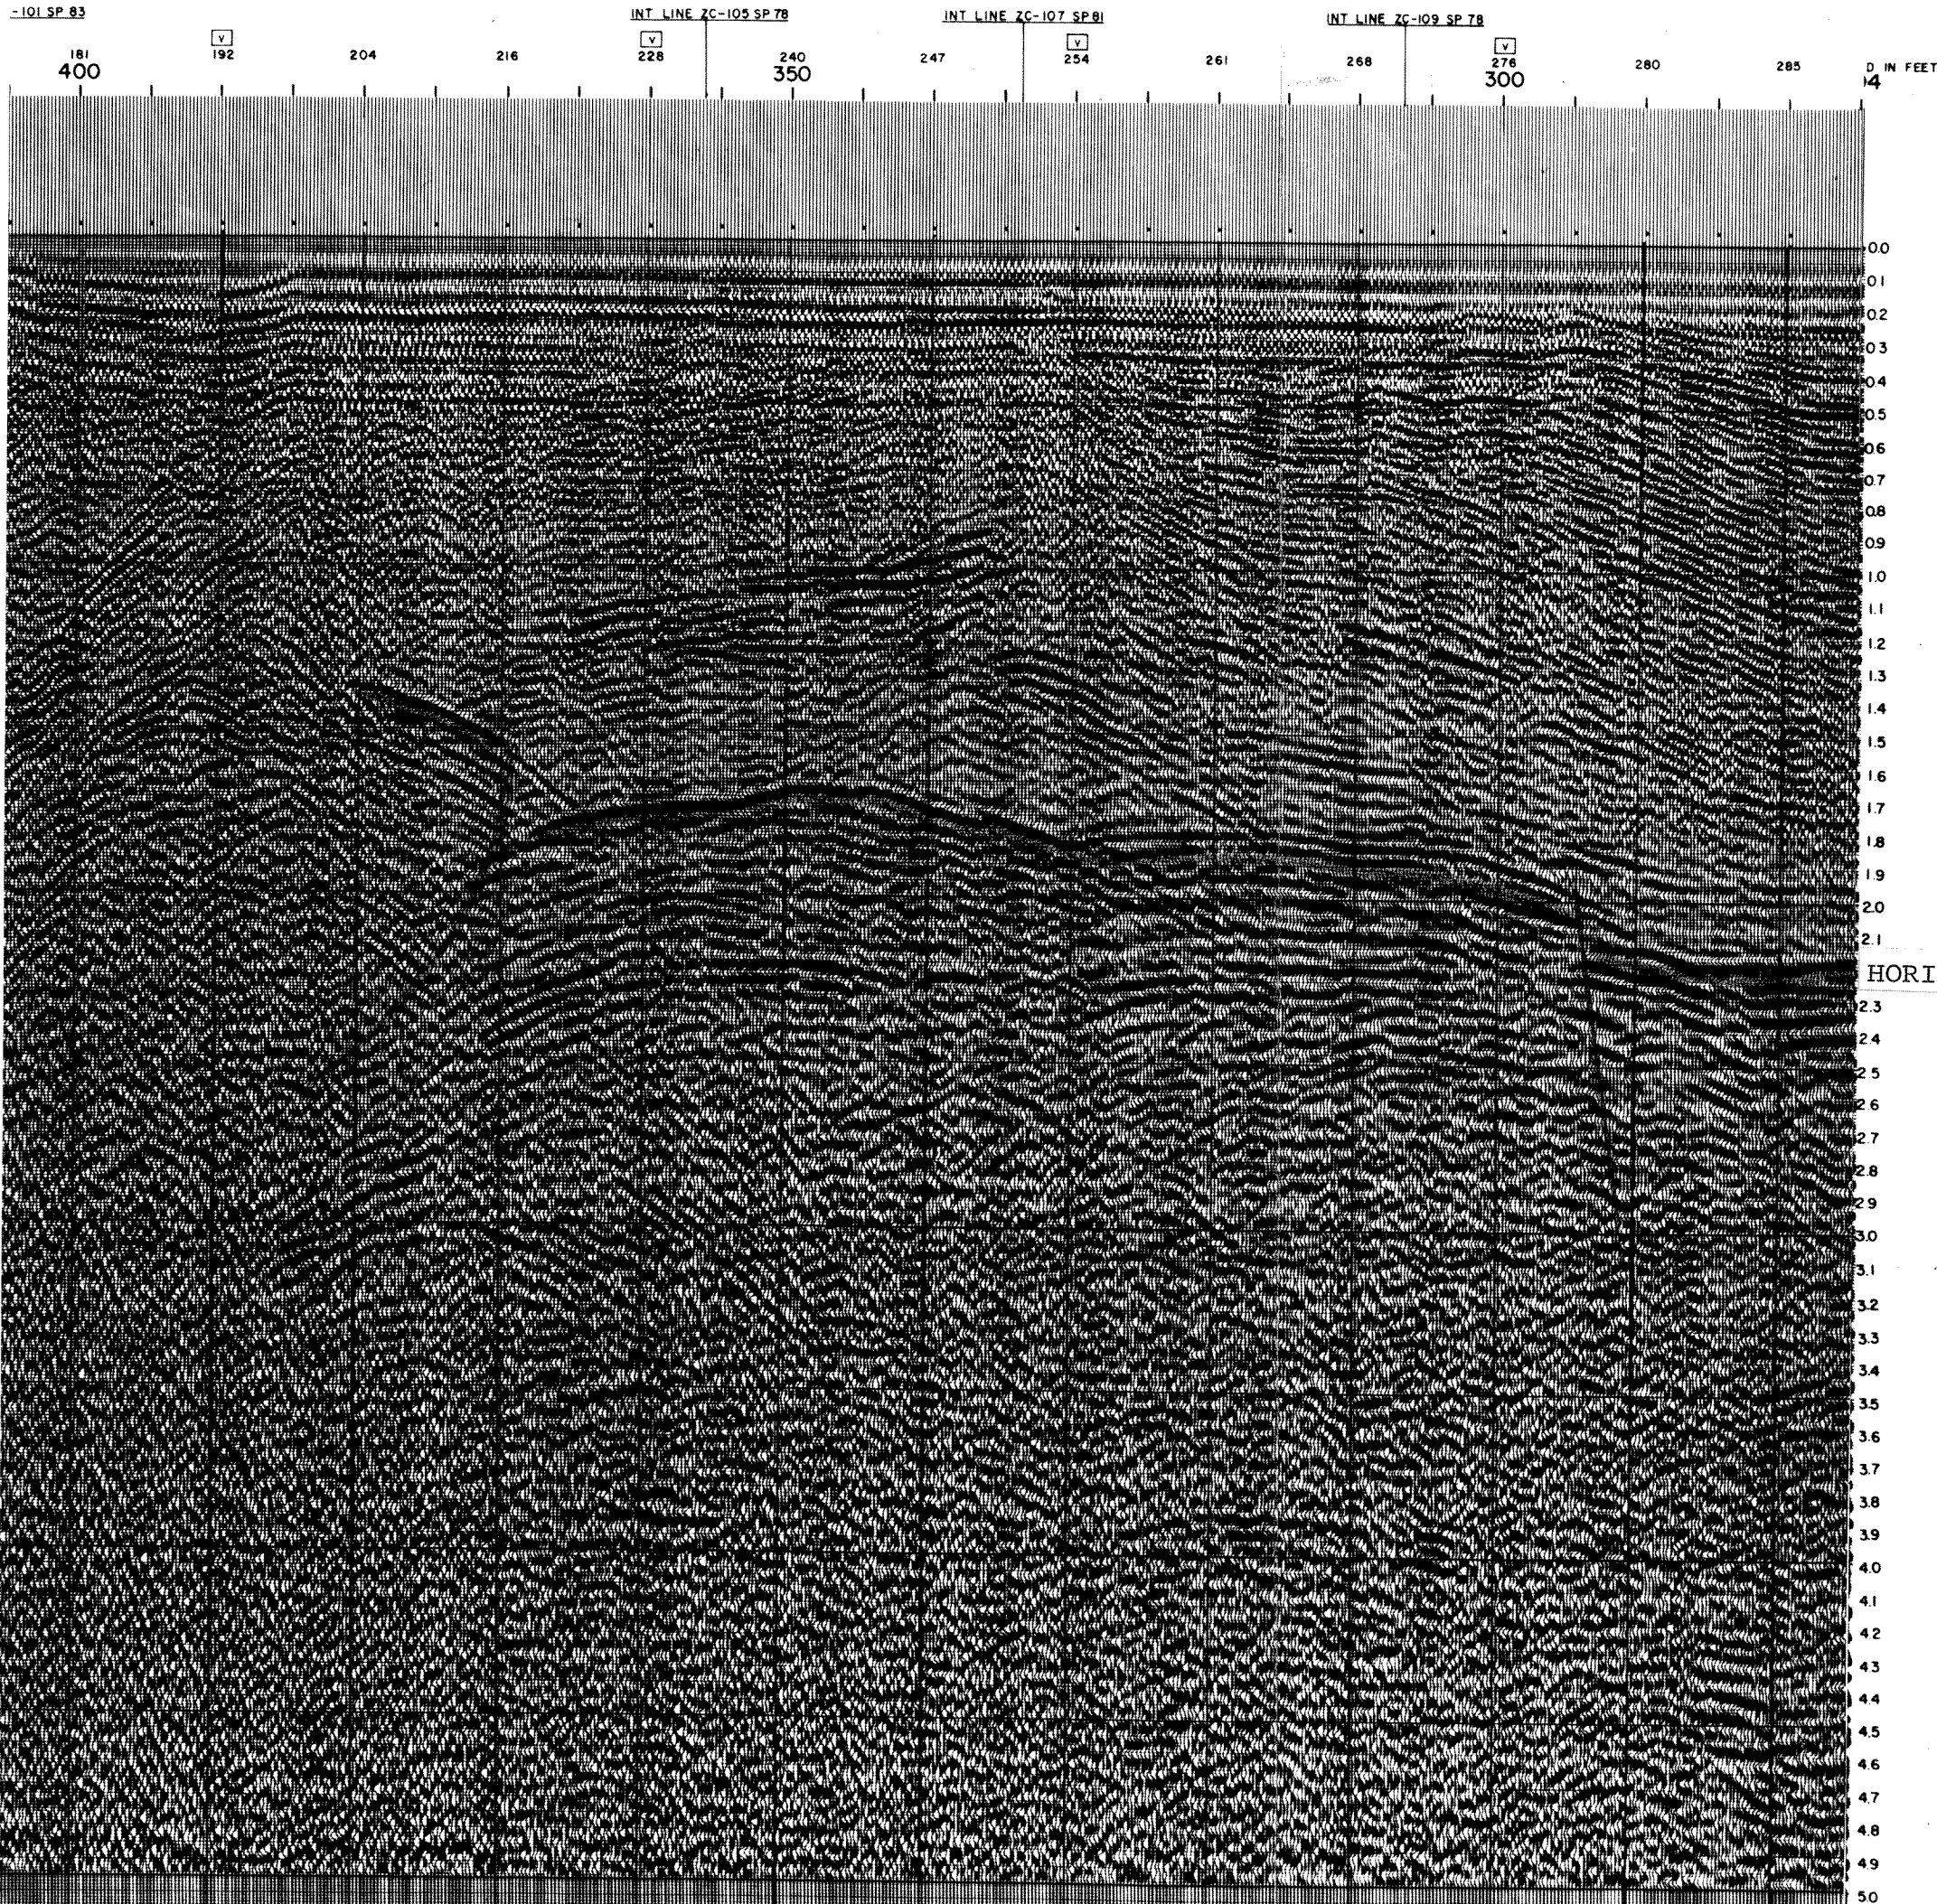

FIELD DATA

RECORDING INSTRUMENTS T.I. DFS III  
 GAIN INFORMATION BINARY  
 RECORDING FILTERS 8-18/62 Hz.

SAMPLE RATE 4 MS  
 GROUP INTERVAL 50 METERS  
 NO. GROUPS 48  
 NEAR GROUP 205.8 METERS  
 SHOTPOINT INTERVAL 100 METERS  
 POP INTERVAL

ENERG. SOURCE AIRGUNS  
 RECORDED BY DIGICON  
 DATE SHOT OCT 16, 1972

PROCESSING

1. EXPONENTIAL GAIN RATE 4 db/Sec. AN 0-4.000 Sec  
 2. VERTICAL STACK  
 6. NORMAL MOVEOUT INPUT FUNCTION

7. T.V. DECON MULTICHANNEL DECON  
 S.P. 405-275 NO. FILTERS 1 WHITE NOISE 1%  
 FILTER LENGTH 304  
 DESIGN GATES NEAR OFFSET 0.500-4.900 Sec  
 DESIGN GATES FAR OFFSET 2.600-4.900 Sec

3. SINGLE FOLD DISPLAY 8 COMMON DEPTH POINT SUM 24 FOLD  
 5. VELOCITY ANALYSIS 9 DESIGN AFTER STACK  
 RESIDUAL NORMAL MOVEOUT II TRAIL AMPLITUDE EQUALIZATION

4. COMMON DEPTH POINT GATHER  
 S.P. 405-275 NO. FILTERS 1 WHITE NOISE 1%  
 FILTER LENGTH 304  
 DESIGN GATES FAR OFFSET 0.500-4.900 Sec  
 DESIGN GATES NEAR OFFSET 0.500-4.900 Sec

10. DIGITAL FILTER NO. FILTERS 3  
 BAND PASS 10 - 40 Hz TIME 0 - 500 SW  
 10 - 30 Hz TIME 1,200 SW  
 5 - 25 Hz TIME 2,500 - 5,000 SW

HORIZON "C"

PROCESSED BY  
 digicon inc  
 HOUSTON, TEXAS

FIG. 5  
 RISERVATO