


SICILY GROUP-AMOCO
LINE ZC-316
SP 82-35

— 1 KM —

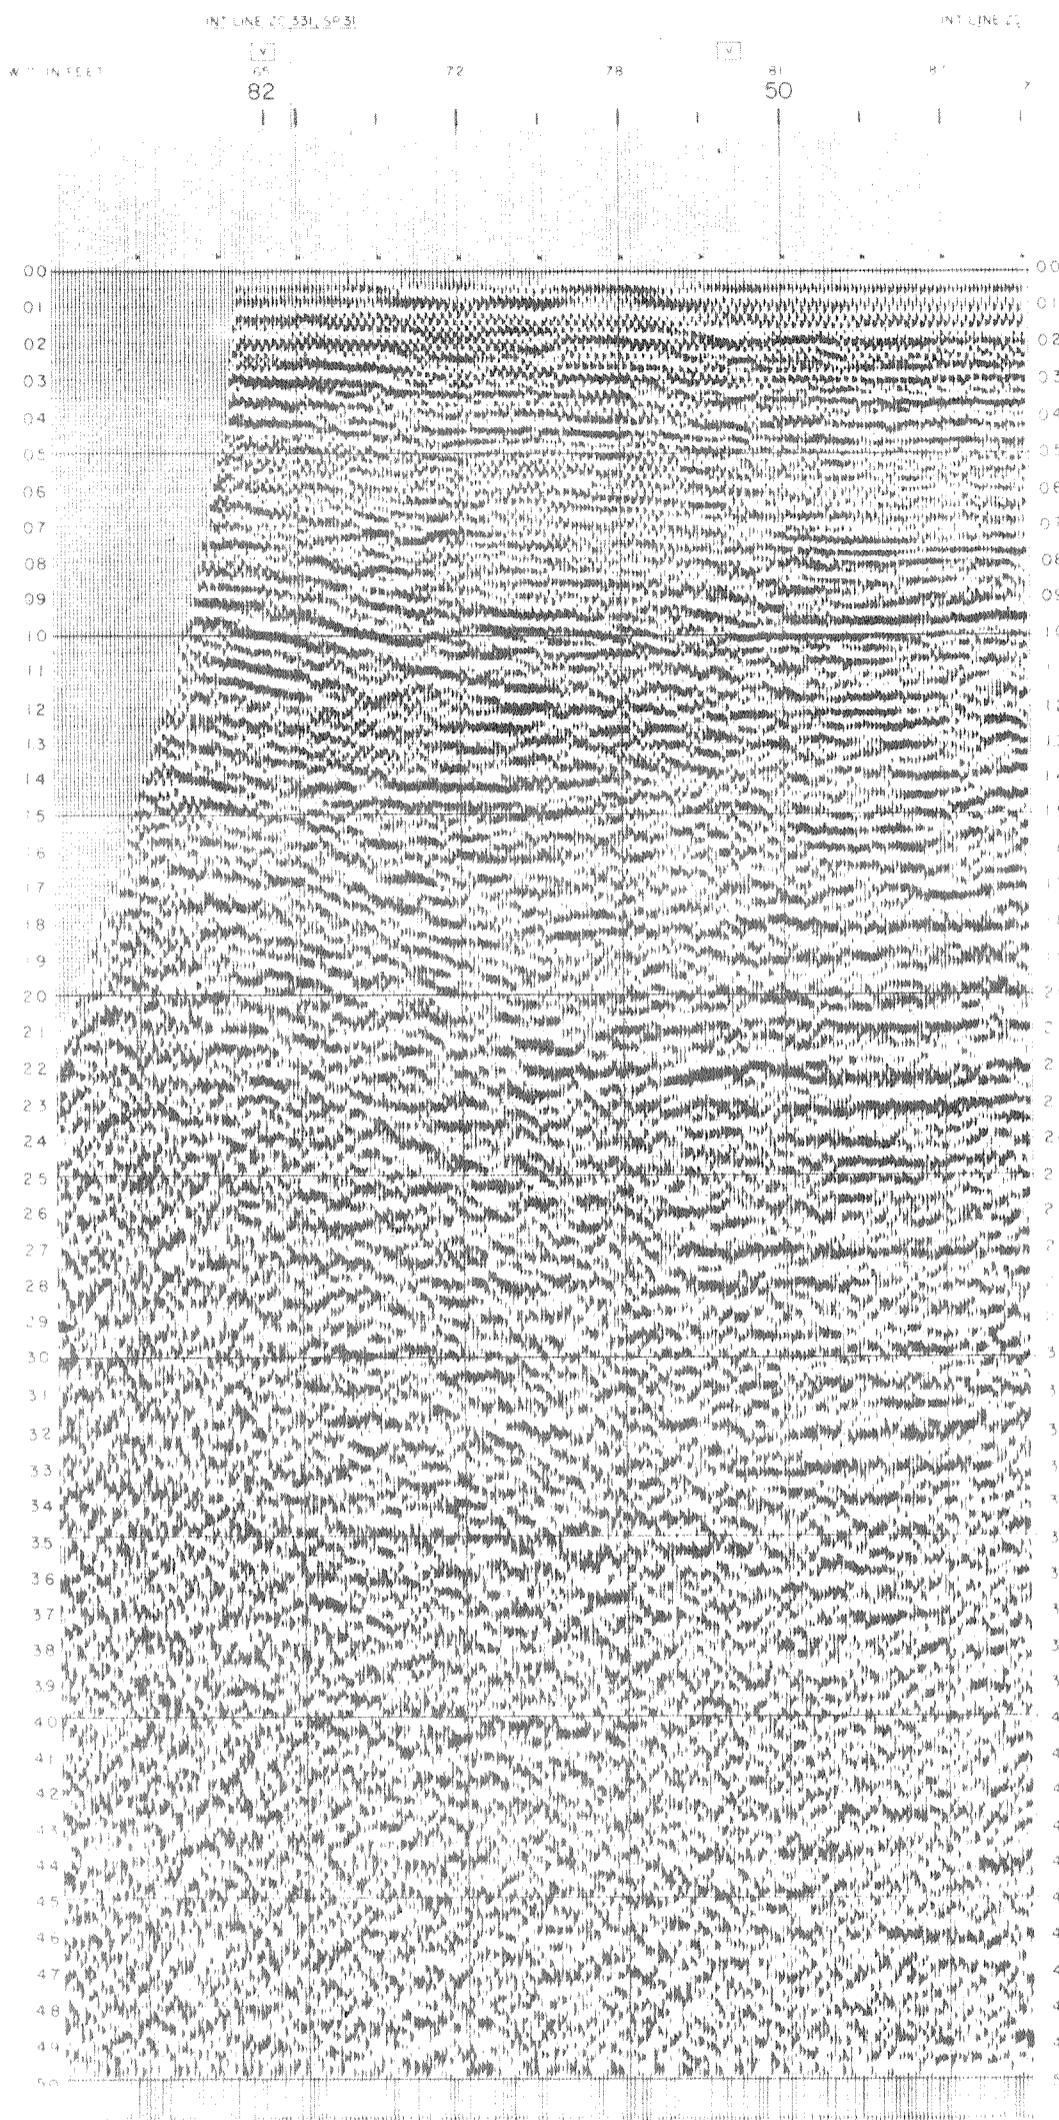

SICILY GROUP-AMOCO LINE ZC-316 SP 82-35

PROJECT SICILY GROUP-AMOCO		
FIELD DATA		
SHOTGUN INSTRUMENT	TI DFS III	
TRANSMITTER	BINARY	
SHOT GUN CYCLES	8-18/62 Hz	
SHOT RATE	4 MS	
SHOT INTERVAL	50 METERS	
SHOT GUN	48	
MAX. DEPTH	205.8 METERS	
SHOT GUN DISTANCE	100 METERS	
SHOT GUN DIA.	25 METERS	
TRANSMITTER	AIRGUN	
RECEIVER	DIGICON INC	
DATE	9-15-72	
PROCESSING		
1. SEGMENTAL GAIN RATE	4 db/Sec	DATE 0 - 4000 Sec
2. LEFT A TALK		
3. CHAMFERING		
7. DECON BEFORE STACK		
82-35	4000 ms	WHITE NOISE 1%
1000 ms	200	
1000 ms	1000 - 4900 ms	
1000 ms	3000 - 4900 ms	
3	3000 ms	8. WEIGHTING 24 HIRD
5	1000 ms	9. LEFT A TALK
4	4000 ms	10. TRAILING EDGE ATTENUATION
7	200	12. AUTO CORRELATION
10	4000 ms	11. 82-35 1000 ms 1000 ms 1%
10	1000 ms	13. 82-35 1000 ms 1000 ms 1%
5	250 ms	14. 82-35 1000 ms 1000 ms 1%
10	4000 ms	15. 82-35 1000 ms 1000 ms 1%
10	3000 ms	16. 82-35 1000 ms 1000 ms 1%
5	250 ms	17. 82-35 1000 ms 1000 ms 1%
PRINCIPAL RX		
digicon inc		
HOUSTON, TEXAS		

© 1972 AMOCO SICILY GROUP. ALL RIGHTS RESERVED. THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF AMOCO SICILY GROUP. IT IS THE PROPERTY OF AMOCO SICILY GROUP AND IS NOT TO BE COPIED, USED, OR DISCLOSED EXCEPT AS AUTHORIZED BY AMOCO SICILY GROUP. THIS DOCUMENT IS NOT TO BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS PROVIDED.