


TYRRHENIAN SEA
 LINE 4
 SP. 3899 - 4047

SEZIONE IDROCARBURI
 di NAPOLI
 21 MAG. 1975
 Prot. N. 1870
 Sez. Posiz.




SEIS CAN DELTA




SP. 3899-4047 FOLD 24 LINE 4
 TYRRHENIAN SEA
 AREA
 CANADIAN SUPERIOR OIL LTD.
 CLIENT
 T/V DECON + 2400% CDP STACK + STVF
 PRIMARY DIGITAL PROCESSES

RECORDING DATA
 RECORDED BY SEISMO SER. LTD. PARTY DATE APR. /74
 ENERGY SOURCE TUNED AIRGUN ARRAY
 SOURCE CONFIGURATION SAMPLE RATE 4 ms
 FIELD TAPE DFS III 9 TR. GAIN BINARY
 RECORD LENGTH 5.0 sec SURVEY SYSTEM LORAN C, SATNAV
 FILTER 8/18-62 Hz. DIRECTION SHOT NE
 CABLE LENGTH 2350 m. CABLE DEPTH #1-46 #46-46
 GROUP INTERVAL 50 m. GEOPHONE TYPE
 OFFSET 280 m. OFF. 1. GEOPHONES / TRACE
 GUN DEPTH 10 m. GEOPHONE SPACING
 FIRING INTERVAL 50 m. SP INTERVAL 50 m.
 MULTIPLICITY 2400%

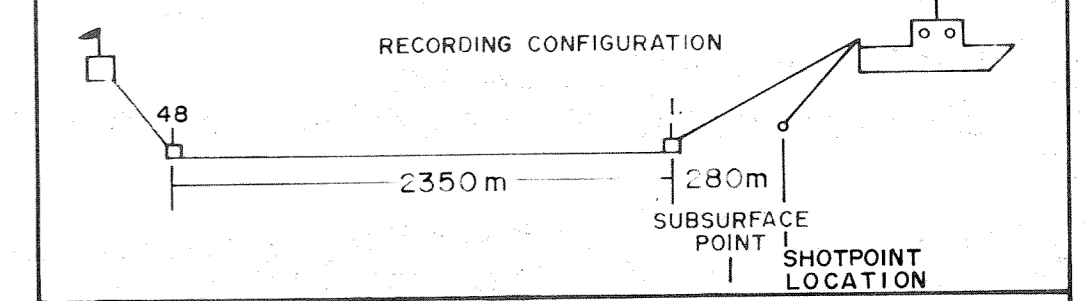

DIGITAL PROCESSES
 PROCESSED BY SEISCAN DELTA LTD. DATE JUNE /74
 1 EDIT SR 4 ms. DATUM SEA LEVEL
 2 GAIN RECOVERY 8 STACK 2400% CDP
 4 T/V DECON OPER 300 ms MULTICHANNEL FILTER
 36 ms PREDICTIVE SEIS/STACK
 PRE-DECON FILTERS COH/OP
 SHALLOW 6-56 Hz. SEIS/SCAN
 DEEP 6-56 Hz.
 POST DECON FILTERS 10 TRACE EQUALIZATION
 SHALLOW 6-56 Hz. WINDOWS
 DEEP 6-56 Hz.
 3 CDP GATHERS 9 DIGITAL FILTER
 5 VELOCITY SPECTRA 11 DISPLAY
 6 NMO 16 TRACES/INCH
 7 MUTING (SEE VERVELS) 3.75 INCHES/SECOND
 PROCESSING RUN 1
 REEL 990
 JOB 51709

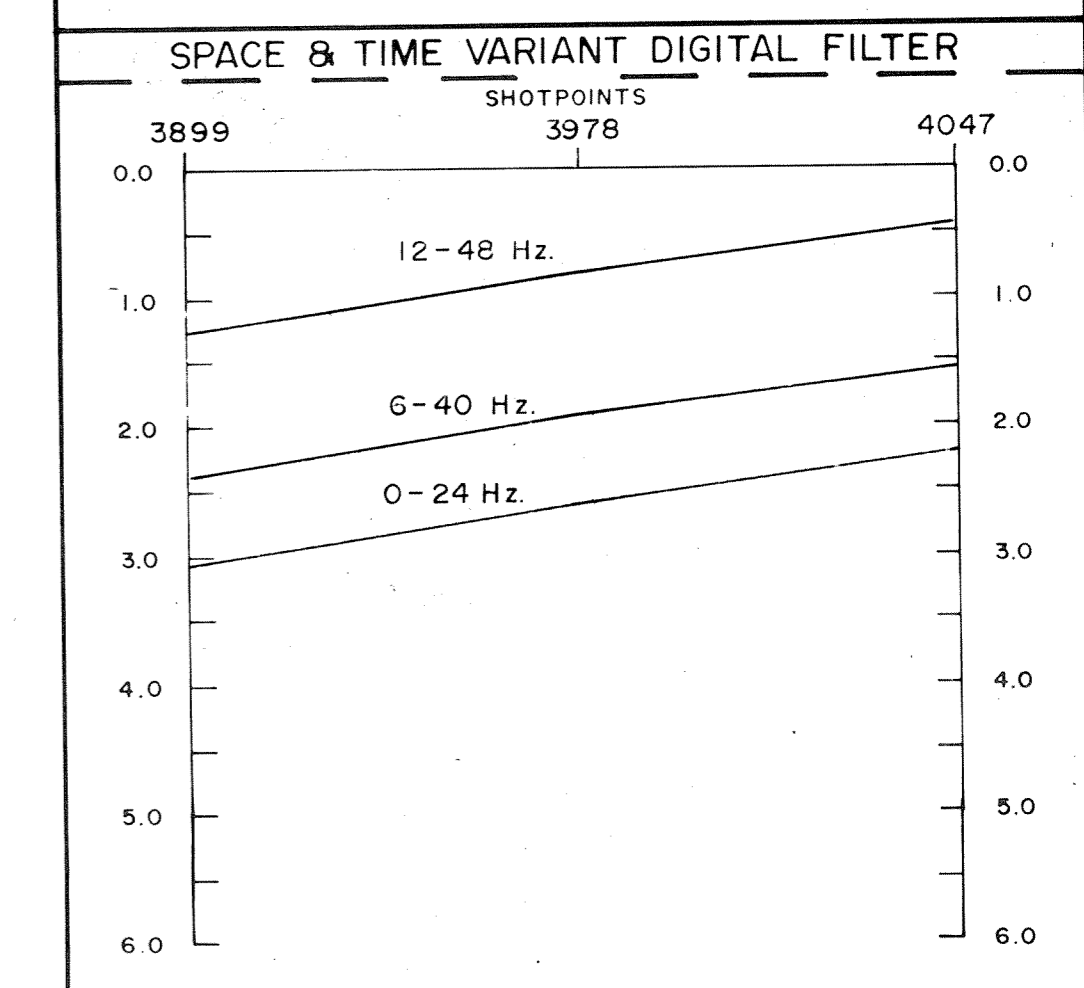

REMARKS

