


TYRRHENIAN SEA
 LINE 6
 SP 4060-4227

SEZIONE IDROCARBURI
 di NAPOLI
 27 MAR 1975
 Prof. N. *187*
 Sez. *187*
 Posiz.

SEISCAN DELTA

Line I SP 3748 VS 4078 VC 4122 VS 4199
 4060 433' 4080 4100 298' 4120 4140 236' 4160 4180 4200 4220 194' 4227

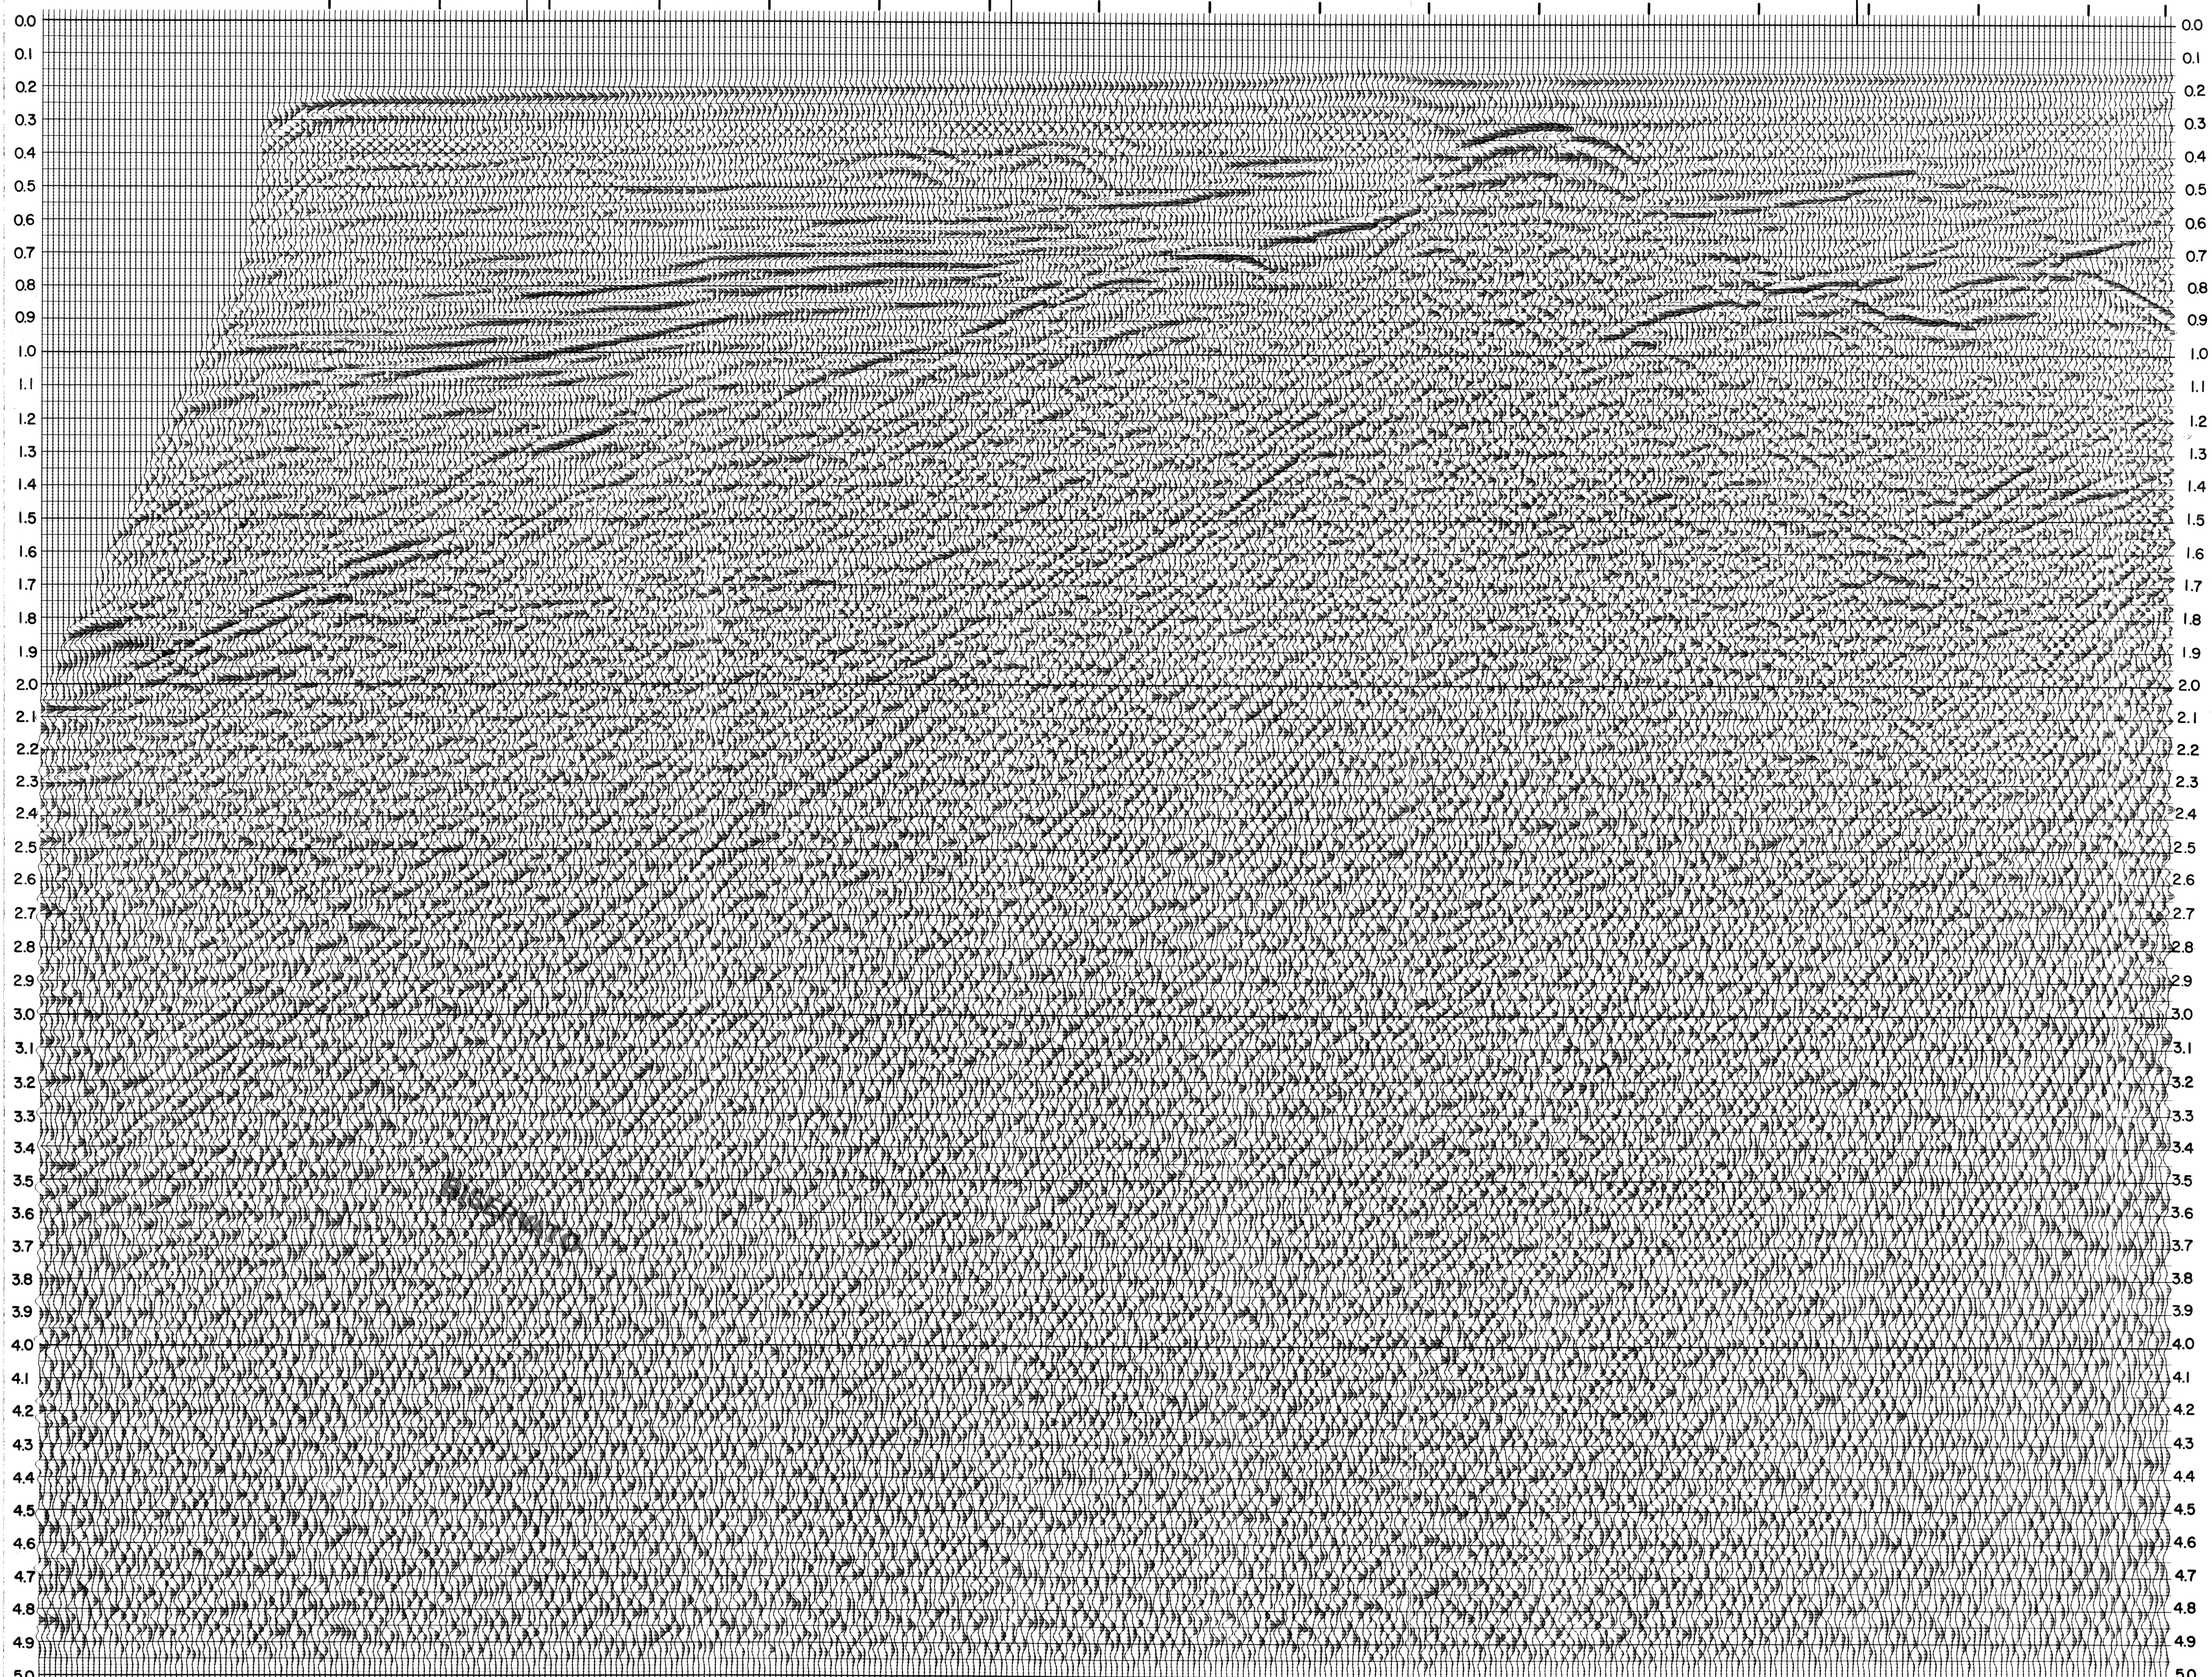


NE

SP 4060-4227 FOLD 24 LINE 6
 TYRRHENIAN SEA AREA
 CANADIAN SUPERIOR OIL LTD. CLIENT
 T/V DECON + 2400% CDP STACK + STVF PRIMARY DIGITAL PROCESSES

RECORDING DATA

RECORDED BY SEISCAN DELTA LTD. PARTY DATE APR / 74
 ENERGY TUNED AIRGUN ARRAY
 SOURCE CONFIGURATION SAMPLE RATE 4 ms
 FIELD TAPE DFS III 9 TR. GAIN BINARY
 RECORD LENGTH 6.0 sec SURVEY SYSTEM LOFAN C, SATNAV
 FILTER 8/18-62 Hz DIRECTION SHOT NE
 CABLE LENGTH 2350 m CABLE DEPTH #1-50 #48-50
 GROUP INTERVAL 50 m GEOPHONE TYPE
 OFFSET 280 m OFF I. GEOPHONES / TRACE
 GUN DEPTH 10 m GEOPHONE SPACING
 FIRING INTERVAL 50 m SP INTERVAL 50 m
 MULTIPLICITY 2400%

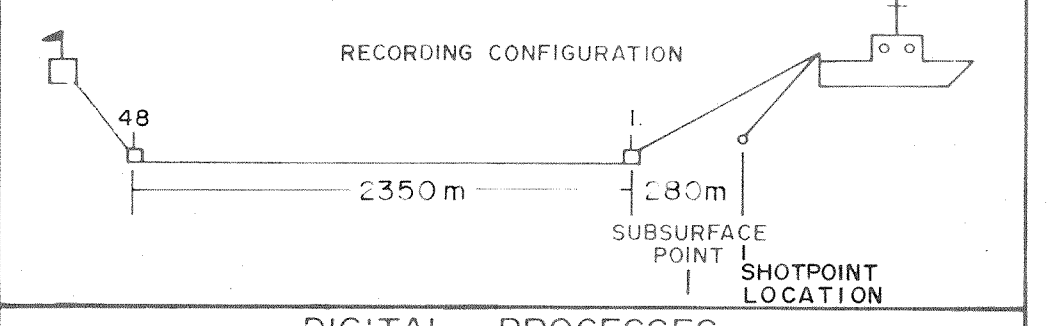


DIGITAL PROCESSES

PROCESSED BY SEISCAN DELTA LTD. DATE JUNE / 74

1 EDIT SR 4 ms DATUM SEA LEVEL
 2 GAIN RECOVERY 8 STACK 2400% CDP
 4 T/V DECON OPER 300* ms MULTICHANNEL FILTER
 36 ms PREDICTIVE SEIS/STACK
 PRE-DECON FILTERS COH/OP
 SHALLOW 6-56 Hz SEIS/SCAN
 DEEP 6-56 Hz
 POST DECON FILTERS 10 TRACE EQUALIZATION
 SHALLOW 6-56 Hz WINDOWS
 DEEP 6-56 Hz

3 CDP GATHERS 9 DIGITAL FILTER
 5 VELOCITY SPECTRA 11 DISPLAY
 6 NMO 16 TRACES/INCH
 7 MUTING (SEE VERVELS) 3.75 INCHES/SECOND

PROCESSING RUN I
 REEL 2830
 JOB 51710

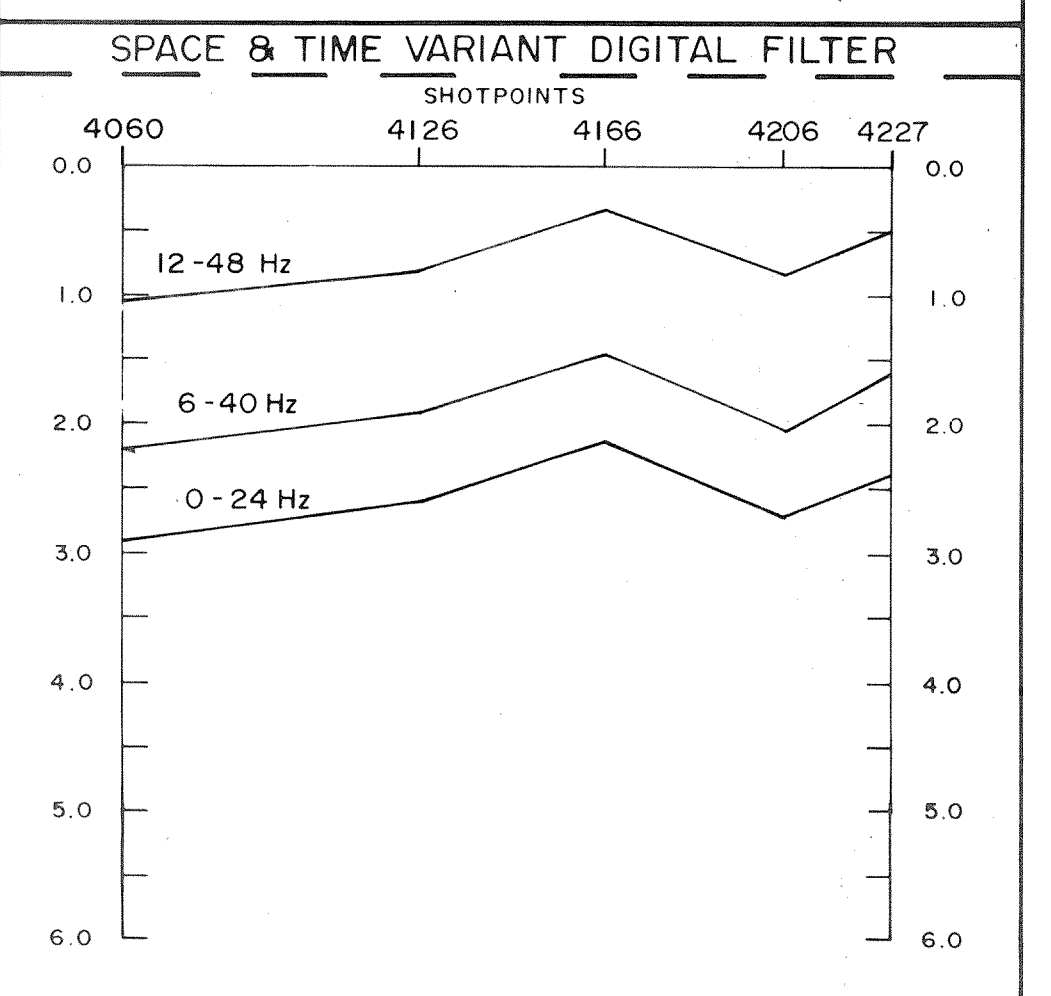

REMARKS