


TYRRHENIAN SEA
 LINE 10
 SP 4460 - 4542

Line 3
 SP 4692

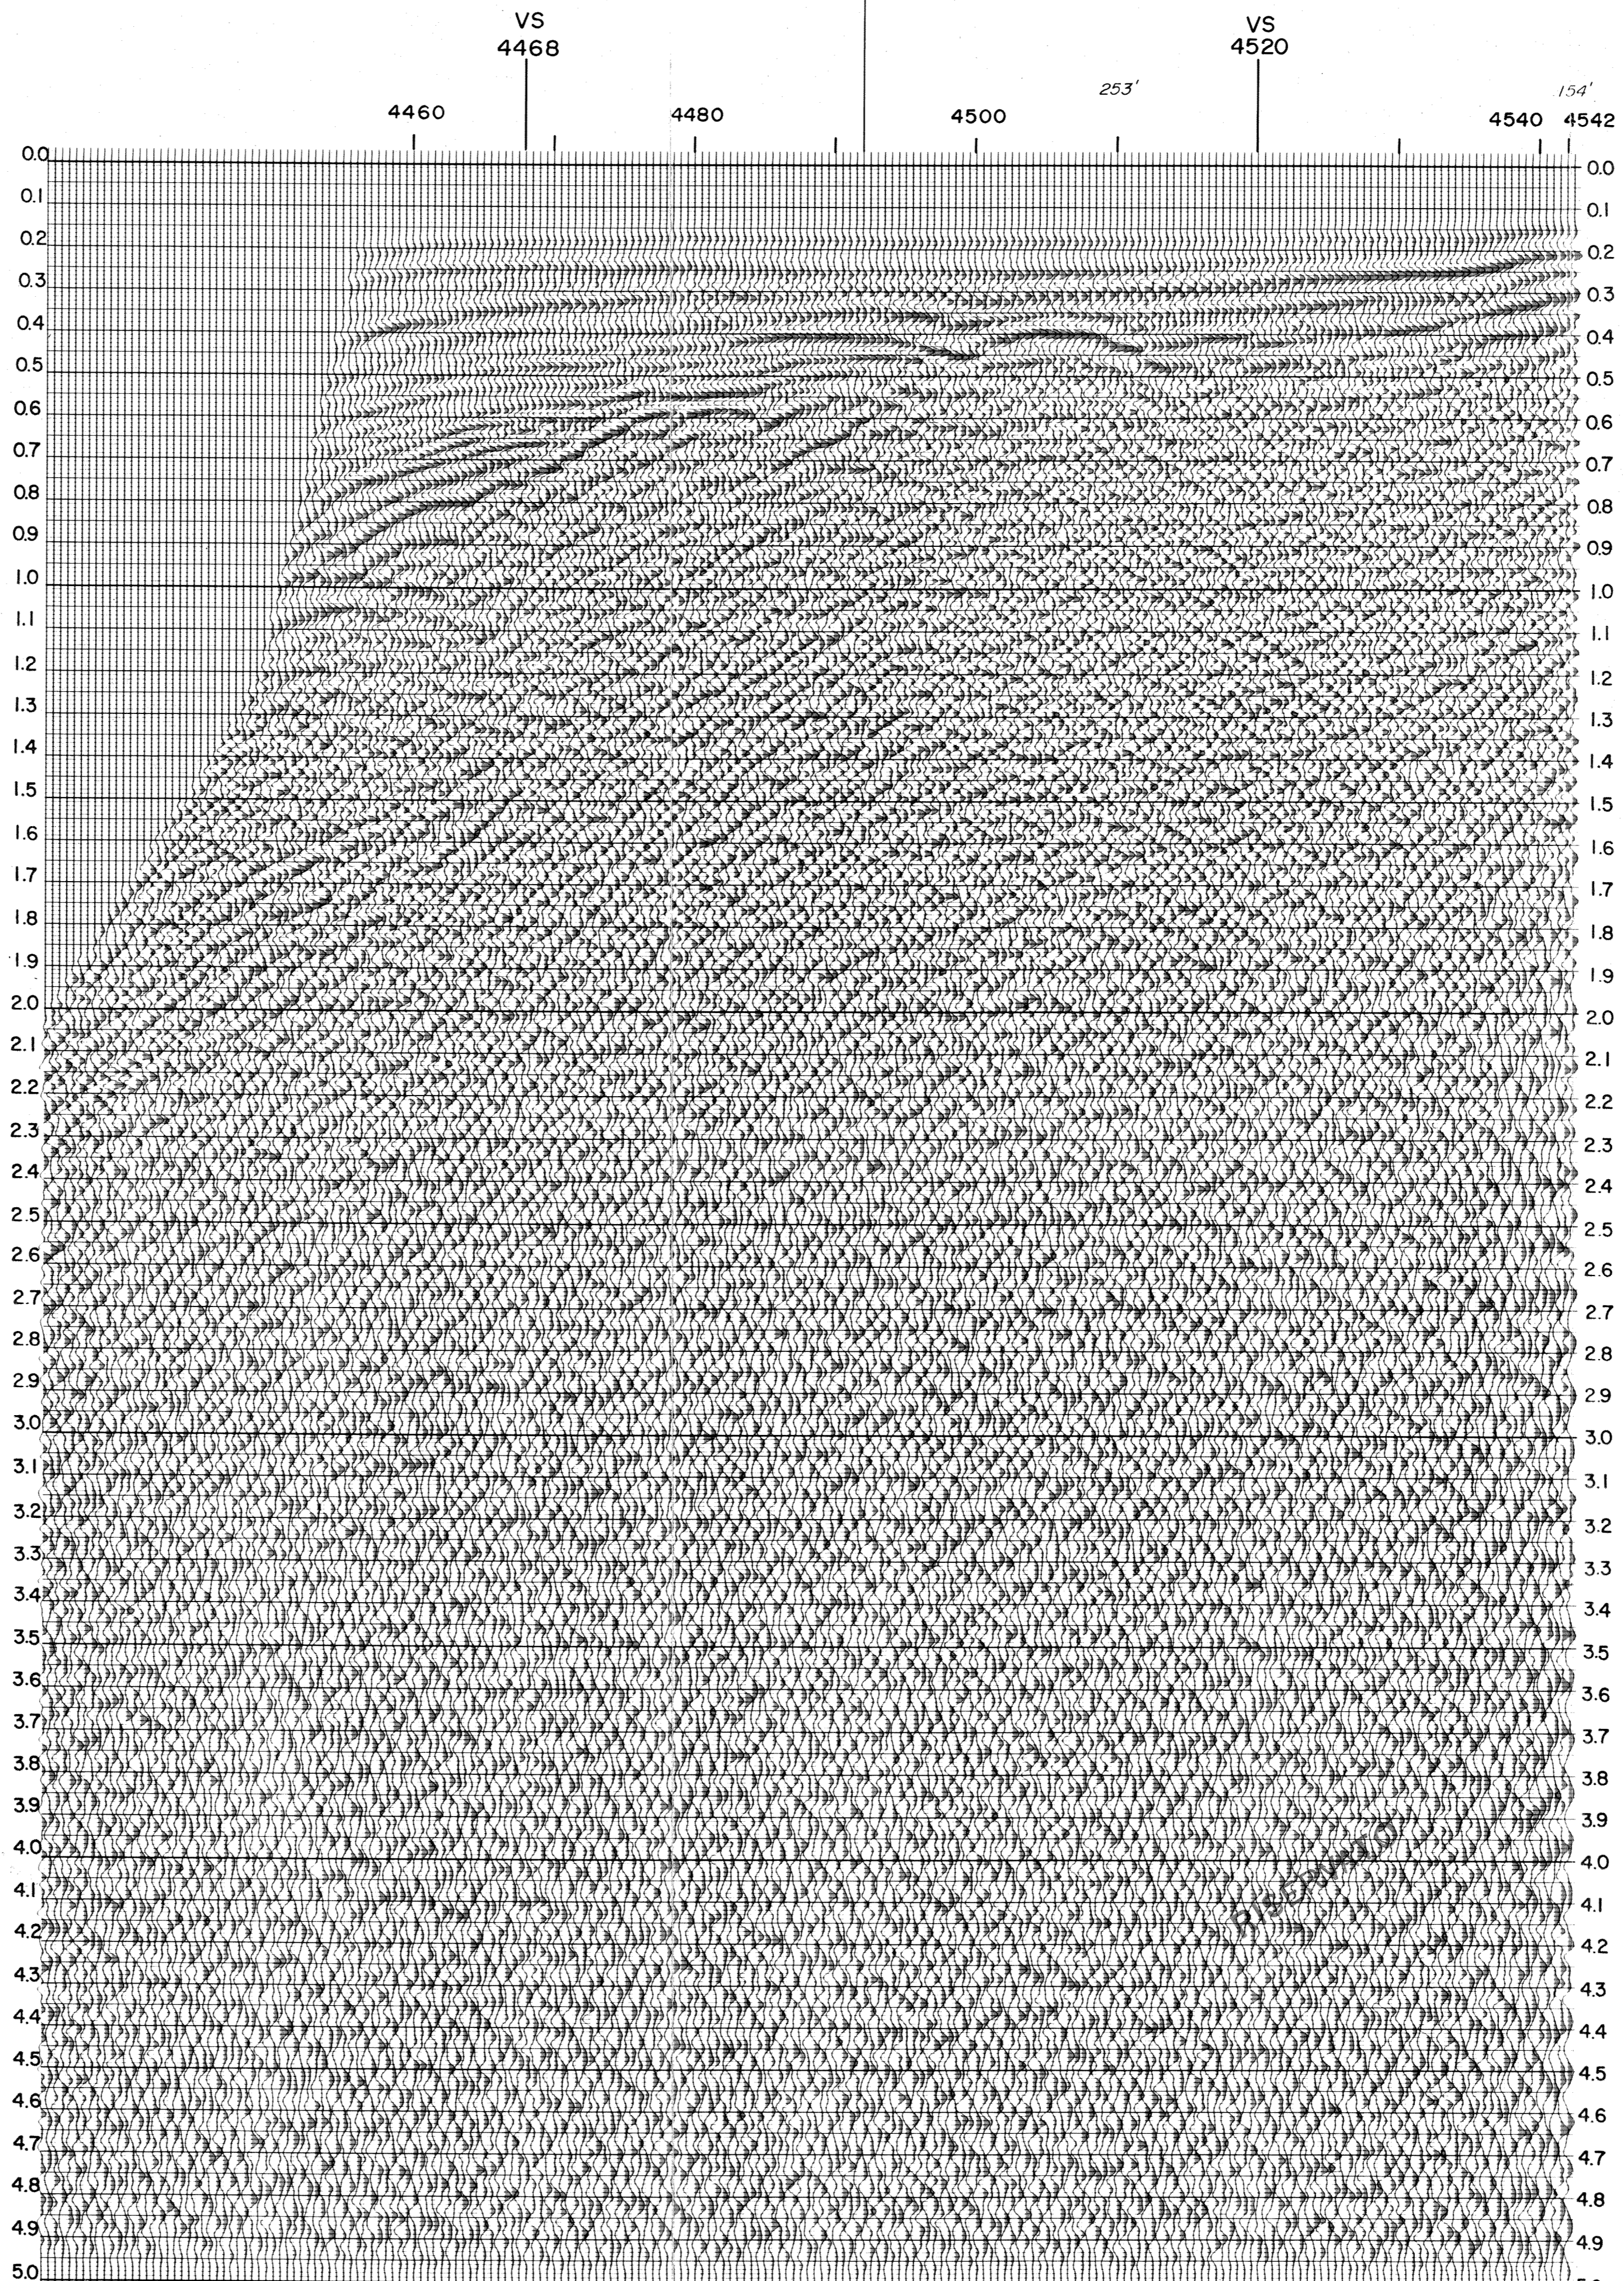


SEIS CAN POIZ DELTA


SEZIONE IDROCARBURI
 di NAPOLI
 27 MAG. 1975
 Prof. N. 1820
 Sez. CAN
 Posiz.

SP 4460-4542 FOLD 24 LINE 10
 TYRRHENIAN SEA
 AREA
 CANADIAN SUPERIOR OIL LTD.
 CLIENT
 T/V DECON + 2400% CDP STACK + STVF
 PRIMARY DIGITAL PROCESSES

RECORDING DATA
 RECORDED BY SEISMO SER. LTD. PARTY DATE APR. /74
 ENERGY SOURCE AIRGUN ARRAY
 SOURCE CONFIGURATION SAMPLE RATE 4 ms
 FIELD TAPE DFS III 9 TR. GAIN BINARY
 RECORD LENGTH 6.0 sec SURVEY SYSTEM LORAN C, SATNAV
 FILTER 8/18 - 62 Hz DIRECTION SHOT NE
 CABLE LENGTH 2350 m. CABLE DEPTH #1-43 #48-43
 GROUP INTERVAL 50 m. GEOPHONE TYPE
 OFFSET 280 m. OFF. 1. GEOPHONES / TRACE
 GUN DEPTH 10 m. GEOPHONE SPACING
 FIRING INTERVAL 50 m. SP INTERVAL 50 m.
 MULTIPLICITY 2400 %

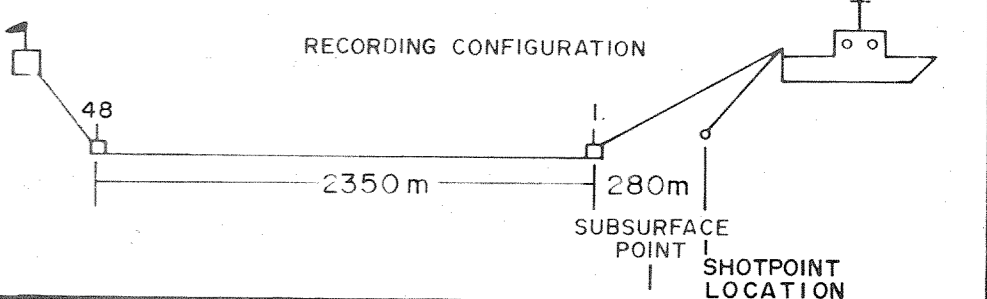

DIGITAL PROCESSES
 PROCESSED BY SEISCAN DELTA LTD. DATE JUNE /74
 1 EDIT SR 4 ms DATUM SEA LEVEL
 2 GAIN RECOVERY 8 STACK 2400% CDP
 4 T/V DECON OPER 300 * ms MULTICHANNEL FILTER
 28 ms PREDICTIVE SEIS/STACK
 PRE-DECON FILTERS COH/OP
 SHALLOW 6-56 Hz SEIS/SCAN
 DEEP 6-56 Hz
 POST DECON FILTERS 10 TRACE EQUALIZATION
 SHALLOW 6-56 Hz WINDOWS
 DEEP 6-56 Hz
 3 CDP GATHERS 9 DIGITAL FILTER
 5 VELOCITY SPECTRA 11 DISPLAY
 6 NMO 16 TRACES/INCH
 7 MUTING (SEE VERVELS) 3.75 INCHES/SECOND
 PROCESSING RUN 2
 REEL 753
 JOB 51712

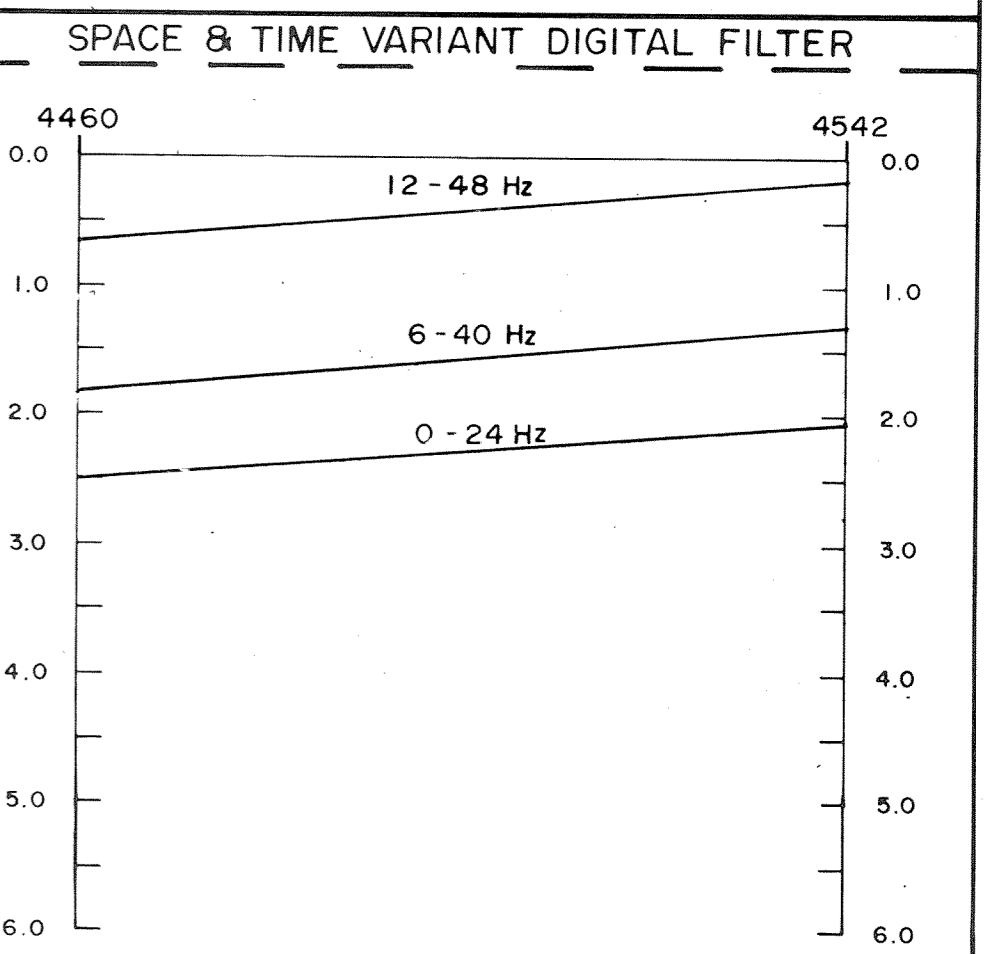

REMARKS