


TYRRHENIAN SEA  
 LINE 12  
 SP 4550 - 4656

SEZIONE IDROCARBURI  
 di NAPOLI  
 27 MAG. 1975  
 Prof. N. 180  
 Sez. Posiz.

SEIS CAN DELTA

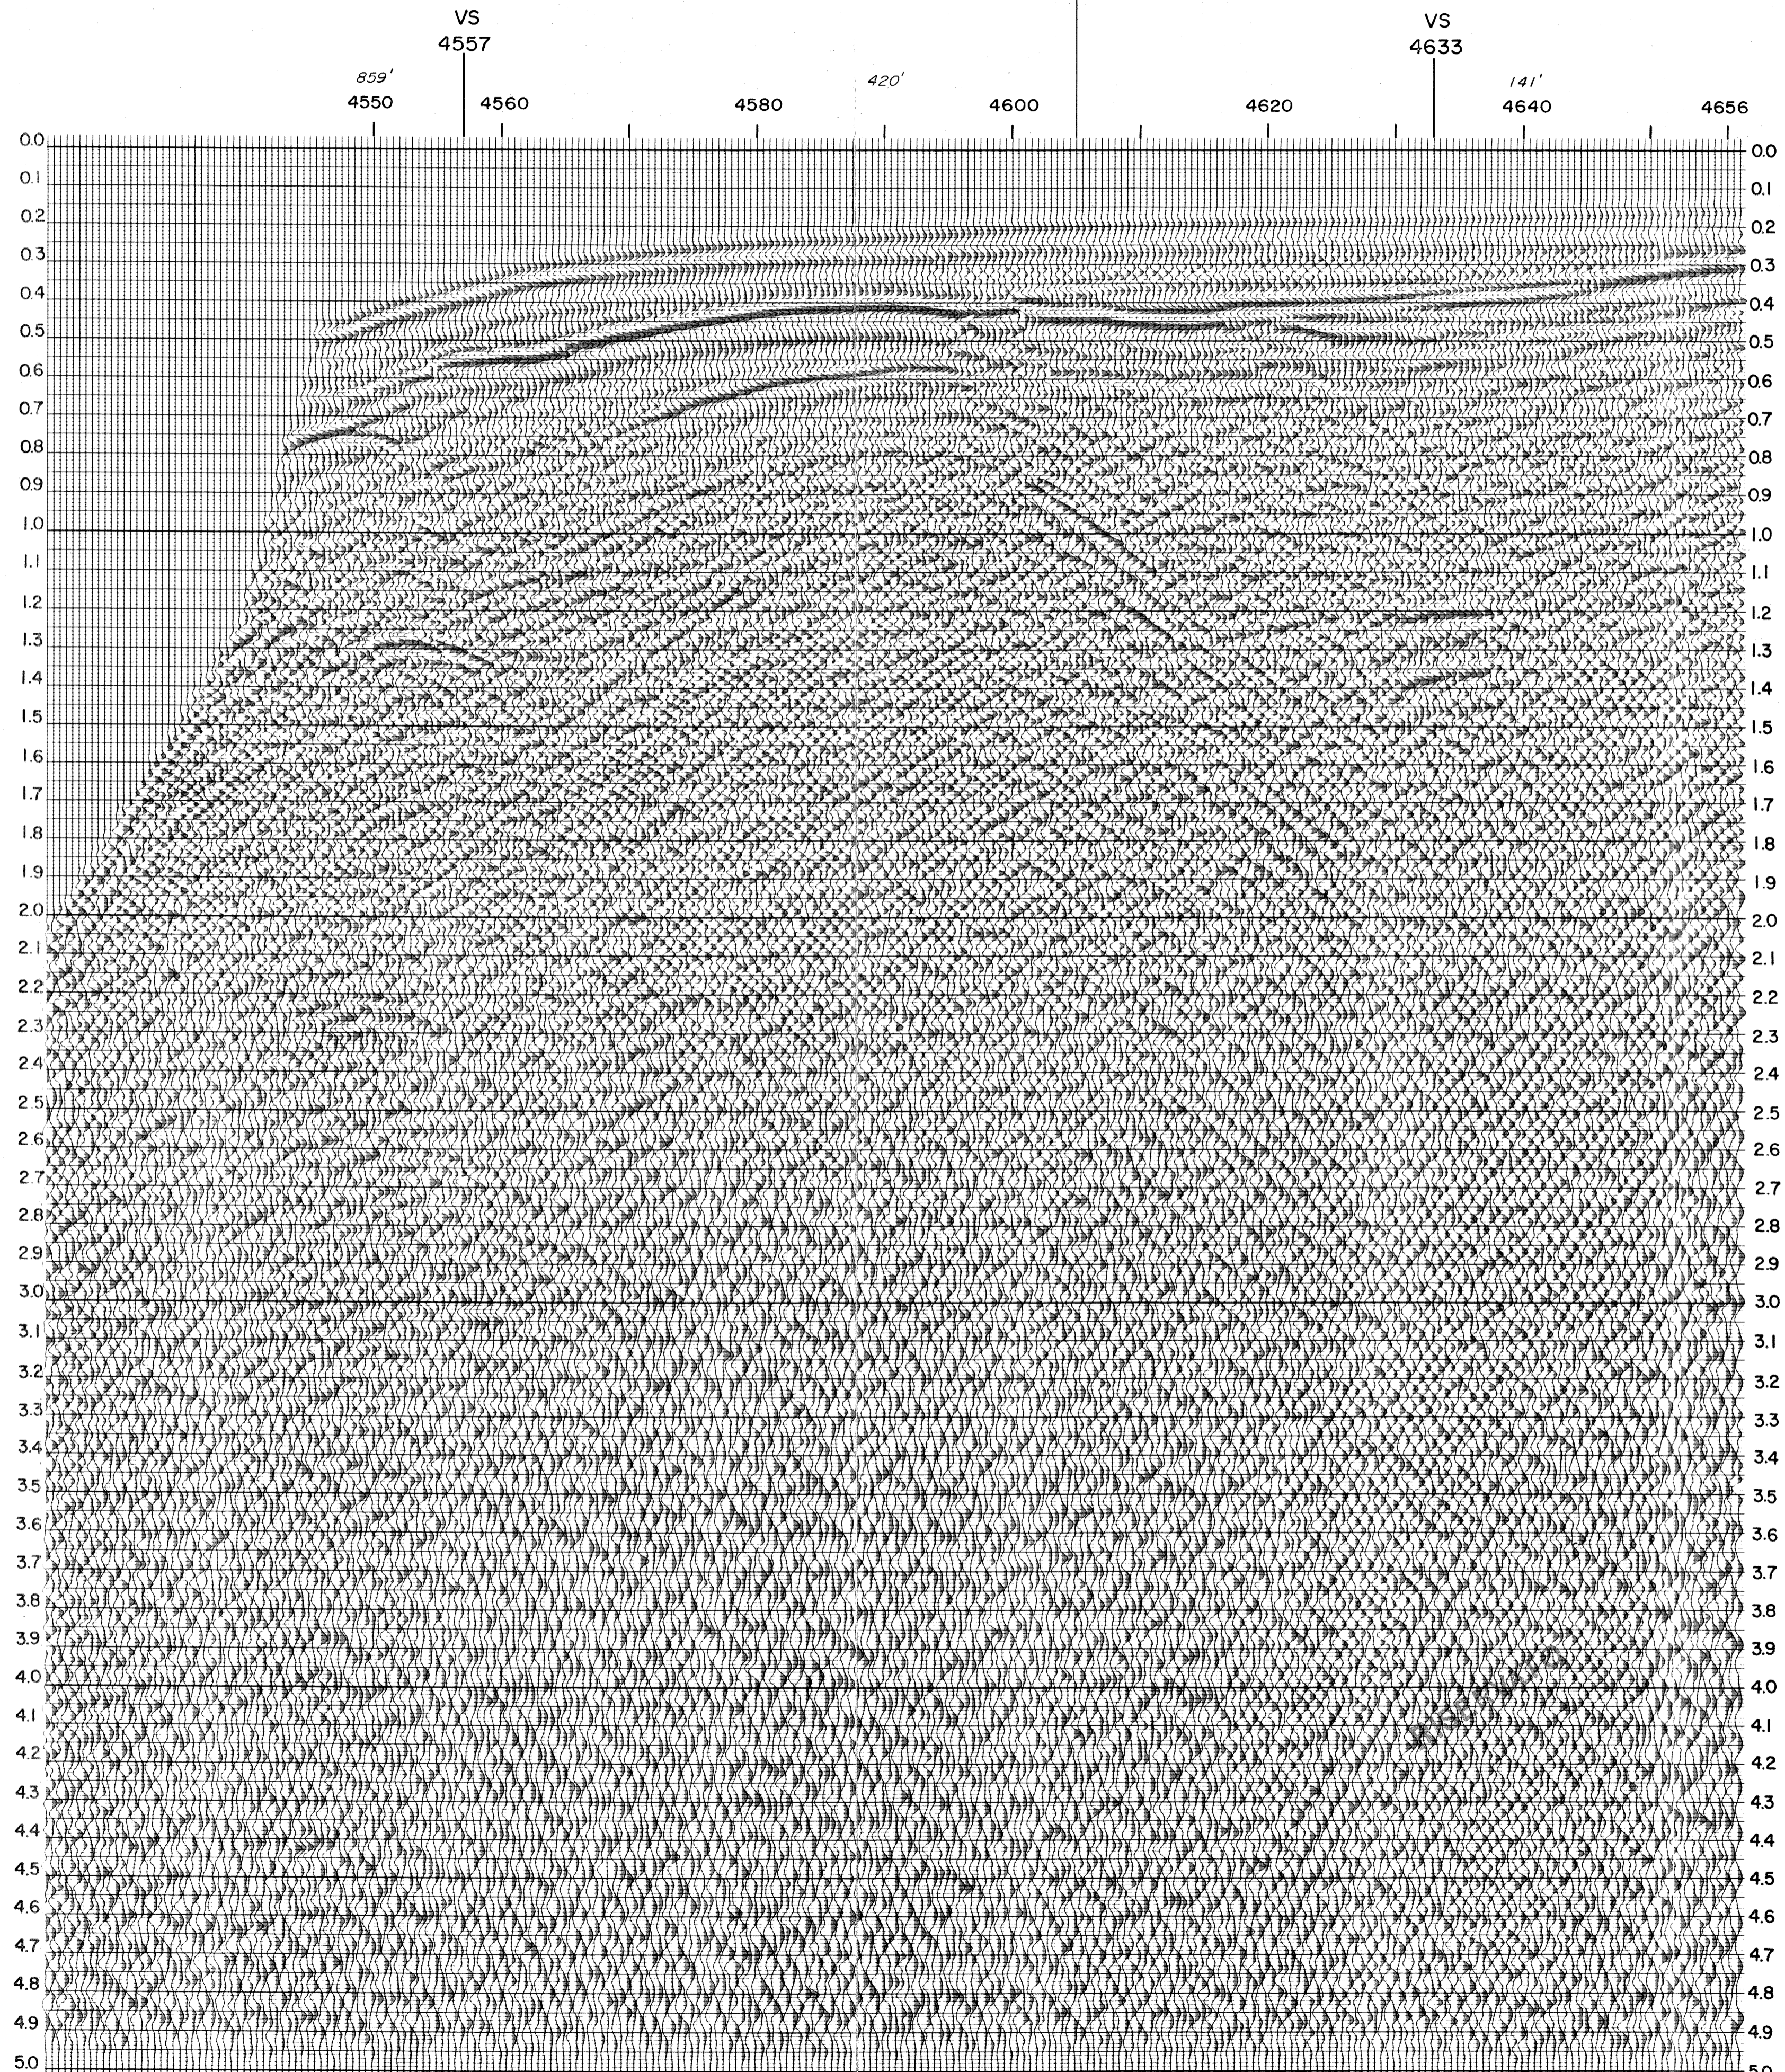

SP 4550-4656 FOLD 24 LINE 12  
 TYRRHENIAN SEA AREA  
 CANADIAN SUPERIOR OIL LTD.  
 CLIENT  
 T/V DECON + 2400% CDP STACK + STVF  
 PRIMARY DIGITAL PROCESSES

RECORDING DATA

RECORDED BY SEISMO. SER. LTD. PARTY DATE APR /74

ENERGY SOURCE TUNED AIRGUN ARRAY

SOURCE CONFIGURATION SAMPLE RATE 4 ms

FIELD TAPE DFS III 9 TR. GAIN BINARY

RECORD LENGTH 6.0 sec SURVEY SYSTEM LORAN C, SATNAV

FILTER 8/18 - 62 Hz DIRECTION SHOT NE

CABLE LENGTH 2350 m. CABLE DEPTH #1-46 #48-46


GROUP INTERVAL 50 m. GEOPHONE TYPE

OFFSET 280 m OFF 1. GEOPHONES / TRACE

GUN DEPTH 10 m. GEOPHONE SPACING

FIRING INTERVAL 50 m. SP INTERVAL 50 m.

MULTIPLICITY 2400 %

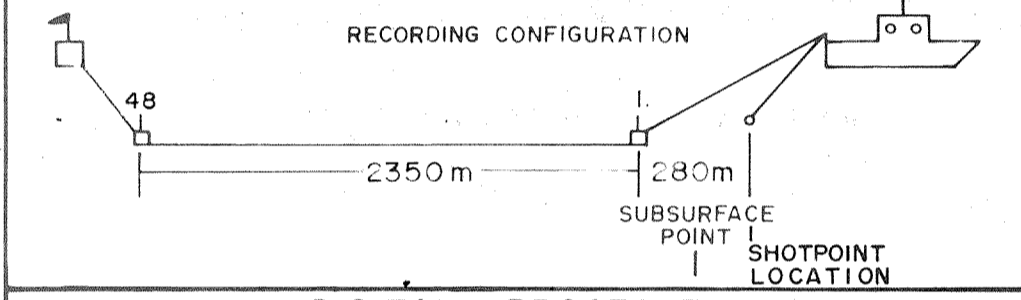

DIGITAL PROCESSES

PROCESSED BY SEISCAN DELTA LTD. DATE JUNE /74

1 EDIT SR 4 ms. DATUM SEA LEVEL

2 GAIN RECOVERY 8 STACK 2400% CDP

4 T/V DECON OPER 400 \* ms MULTICHANNEL FILTER

28 ms PREDICTIVE SEIS / STACK

PRE-DECON FILTERS COH/OP

SHALLOW 6-56 Hz SEIS/SCAN

DEEP 6-56 Hz

POST DECON FILTERS 10 TRACE EQUALIZATION

SHALLOW 6-56 Hz WINDOWS

DEEP 6-56 Hz

3 CDP GATHERS 9 DIGITAL FILTER

5 VELOCITY SPECTRA 11 DISPLAY


6 NMO 16 TRACES / INCH

7 MUTING (SEE VERVELS) 3.75 INCHES / SECOND

PROCESSING RUN 2

REEL 1380

JOB 51713

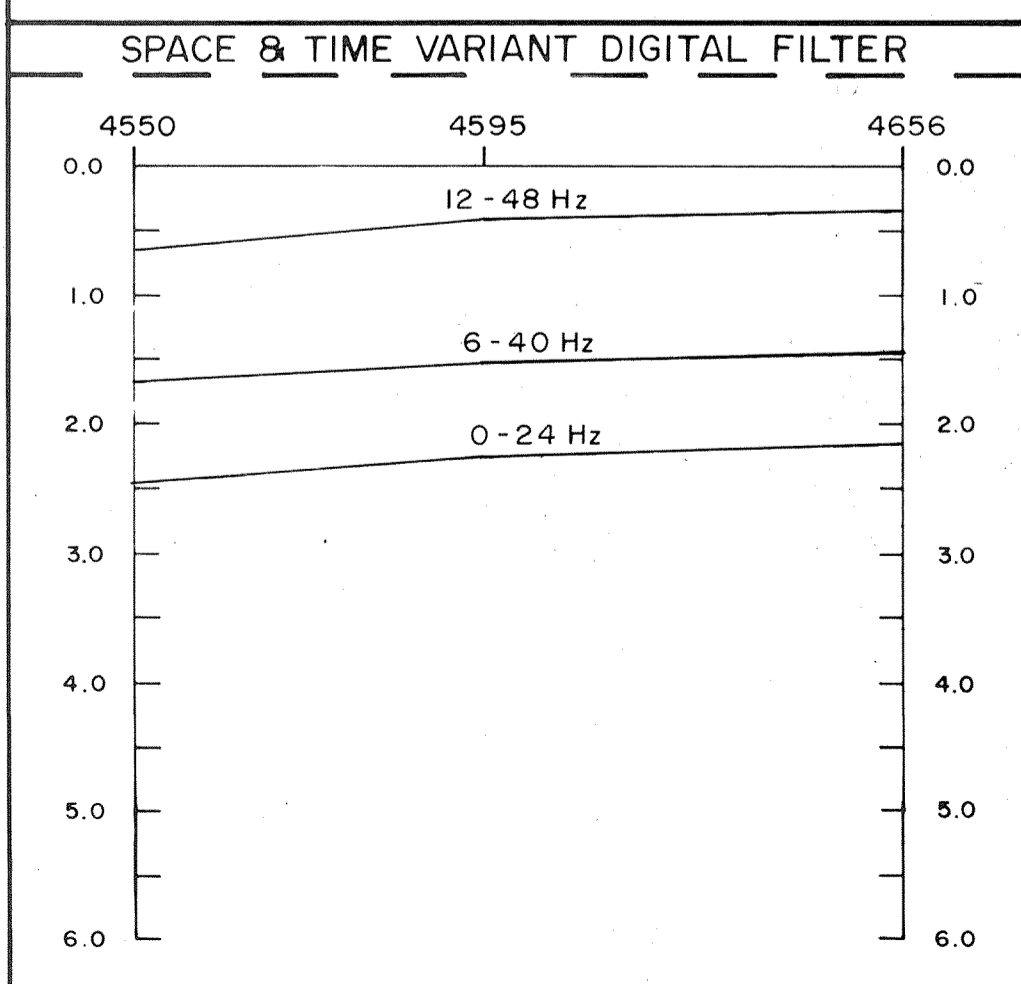

REMARKS

RISERVATO