


TYRRHENIAN SEA  
LINE 20  
SP 5180 - 5262

Line 5  
SP 253

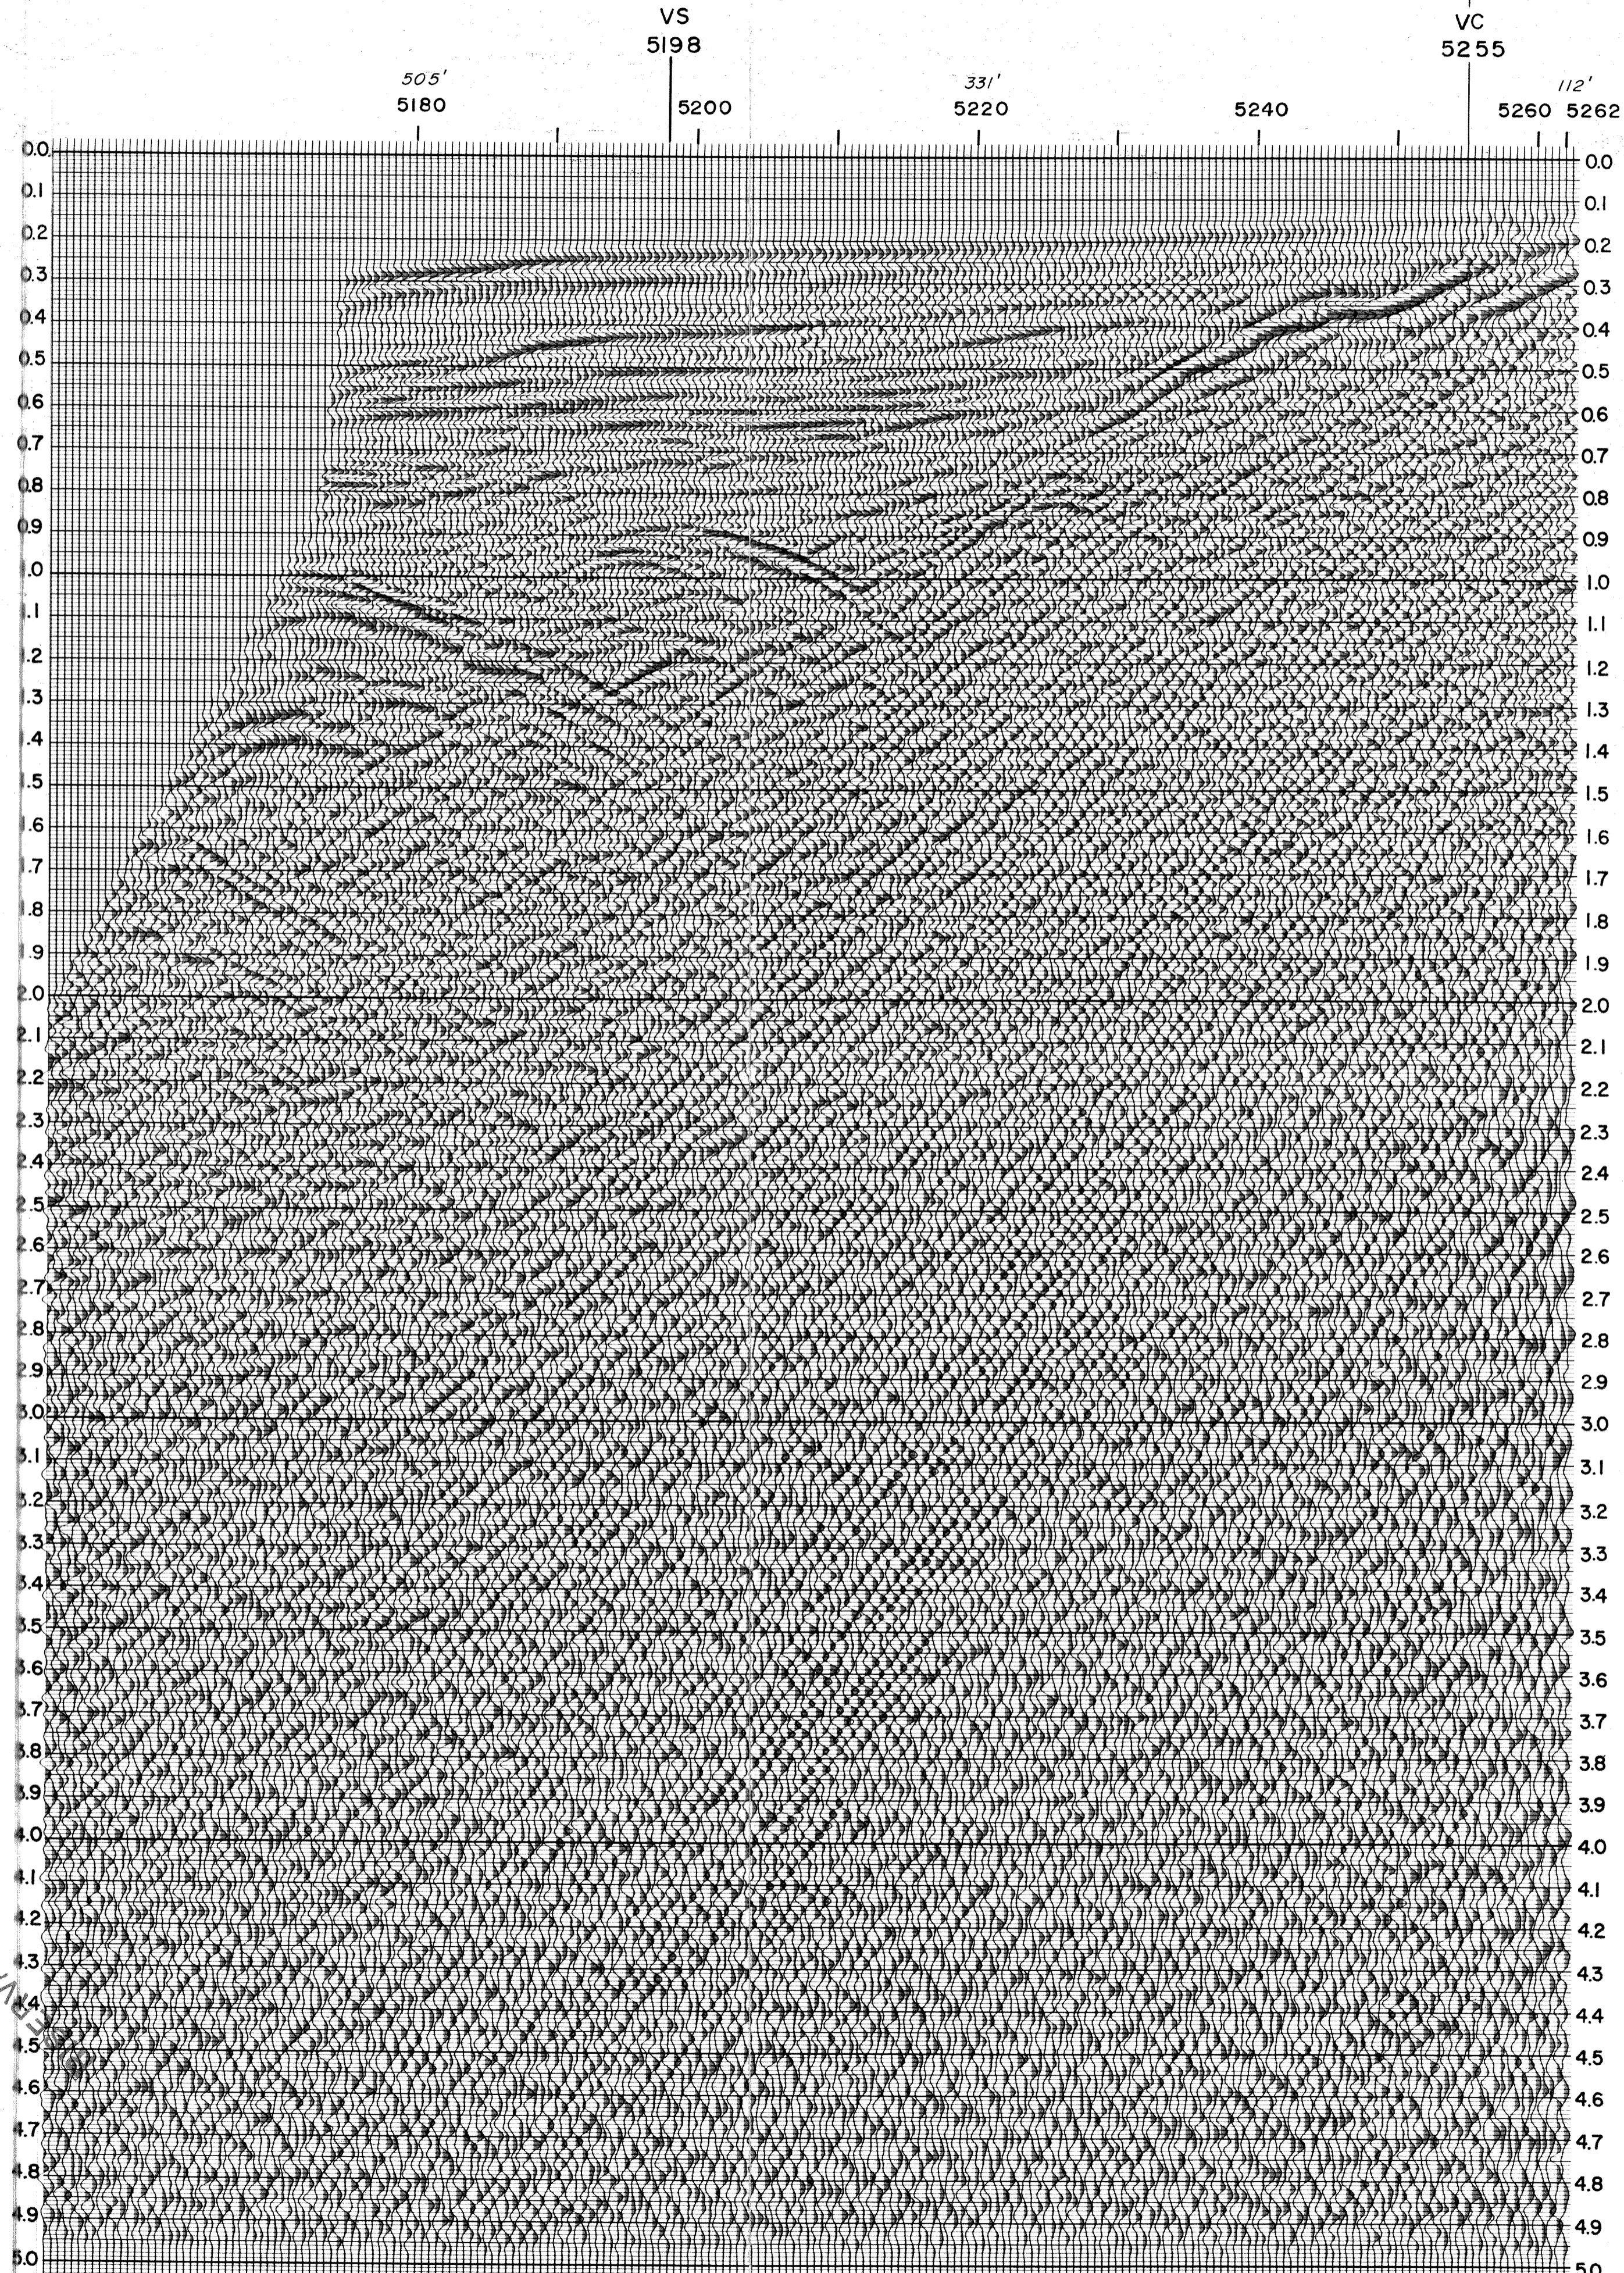

SEZIONE IDROCARBURI  
di NAPOLI  
27 MAG. 1975  
Prof. N. 1830  
Sez.  
Postz.

SEIS CAN RISERVATO DELTA



SP 5180 - 5262 FOLD 24 LINE 20


TYRRHENIAN SEA AREA

CANADIAN SUPERIOR OIL LTD. CLIENT

T/V DECON + 2400% CDP STACK + STVF  
PRIMARY DIGITAL PROCESSES

RECORDING DATA


RECORDED BY SEISMO. SER. LTD. PARTY DATE APR / 74  
ENERGY SOURCE TUNED AIRGUN ARRAY  
SOURCE CONFIGURATION SAMPLE RATE 4 ms  
FIELD TAPE DFS III 9 TR. GAIN BINARY  
RECORD LENGTH 6.0 sec SURVEY SYSTEM LORAN C, SATNAV  
FILTER 8/18 - 62 Hz DIRECTION SHOT NE  
CABLE LENGTH 2350 m. CABLE DEPTH #1-46 #48-46  
GROUP INTERVAL 50 m. GEOPHONE TYPE  
OFFSET 280 m. OFF I. GEOPHONES / TRACE  
GUN DEPTH 10 m. GEOPHONE SPACING  
FIRING INTERVAL 50 m. SP INTERVAL 50 m.  
MULTIPLICITY 2400%

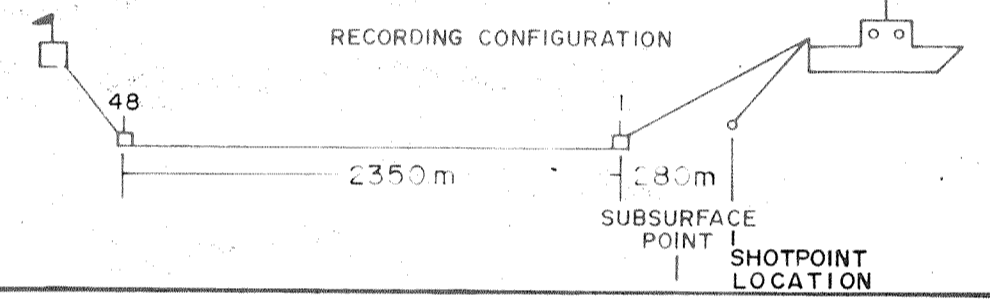

DIGITAL PROCESSES

PROCESSED BY SEISCAN DELTA LTD. DATE JUNE / 74  
1 EDIT SR 4 ms DATUM SEA LEVEL  
2 GAIN RECOVERY 8 STACK 2400% CDP  
4 T/V DECON OPER 320 \* ms MULTICHANNEL FILTER  
36 ms PREDICTIVE SEIS/STACK  
PRE-DECON FILTERS COH/OP  
SHALLOW 6-56 Hz. SEIS/SCAN  
DEEP 6-56 Hz.  
POST DECON FILTERS 10 TRACE EQUALIZATION  
SHALLOW 6-56 Hz. WINDOWS  
DEEP 6-56 Hz.  
3 CDP GATHERS 9 DIGITAL FILTER  
5 VELOCITY SPECTRA 11 DISPLAY  
6 NMO 16 TRACES/INCH  
7 MUTING (SEE VERIVELS) 3.75 INCHES/SECOND  
PROCESSING RUN 1  
REEL 2113  
JOB 718

SPACE & TIME VARIANT DIGITAL FILTER

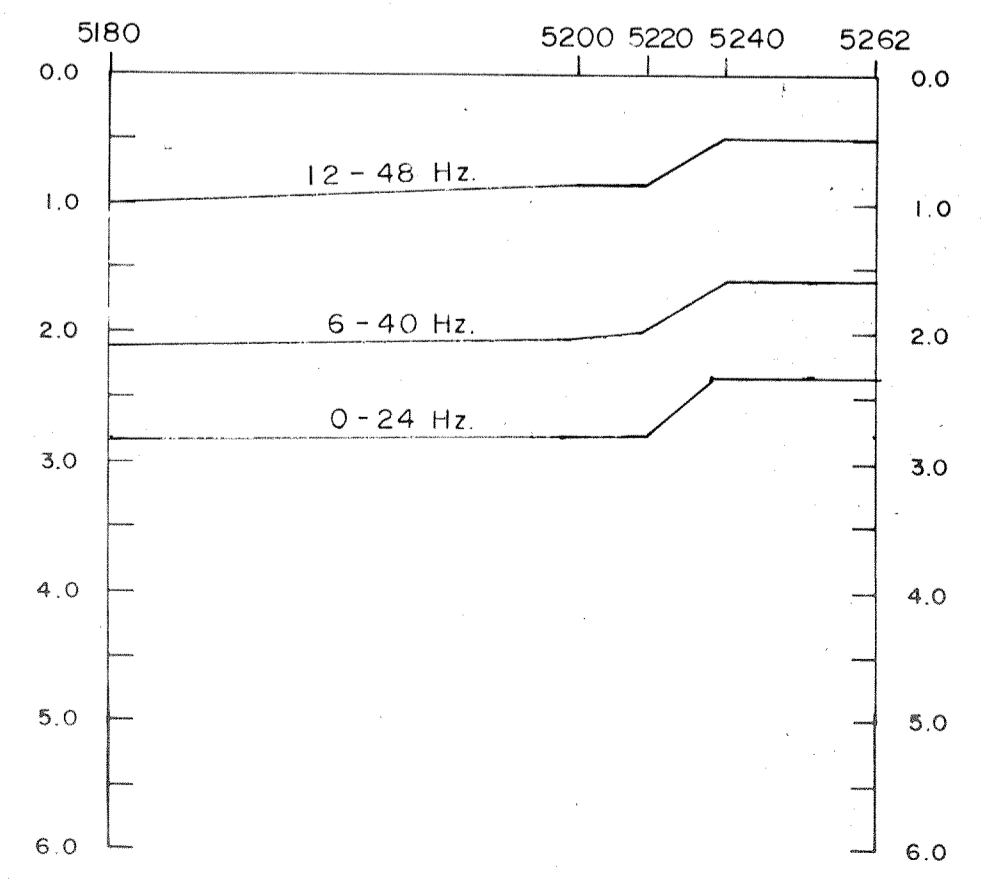

REMARKS