


TYRRHENIAN SEA
LINE 5B
SP. 1917 - 1620

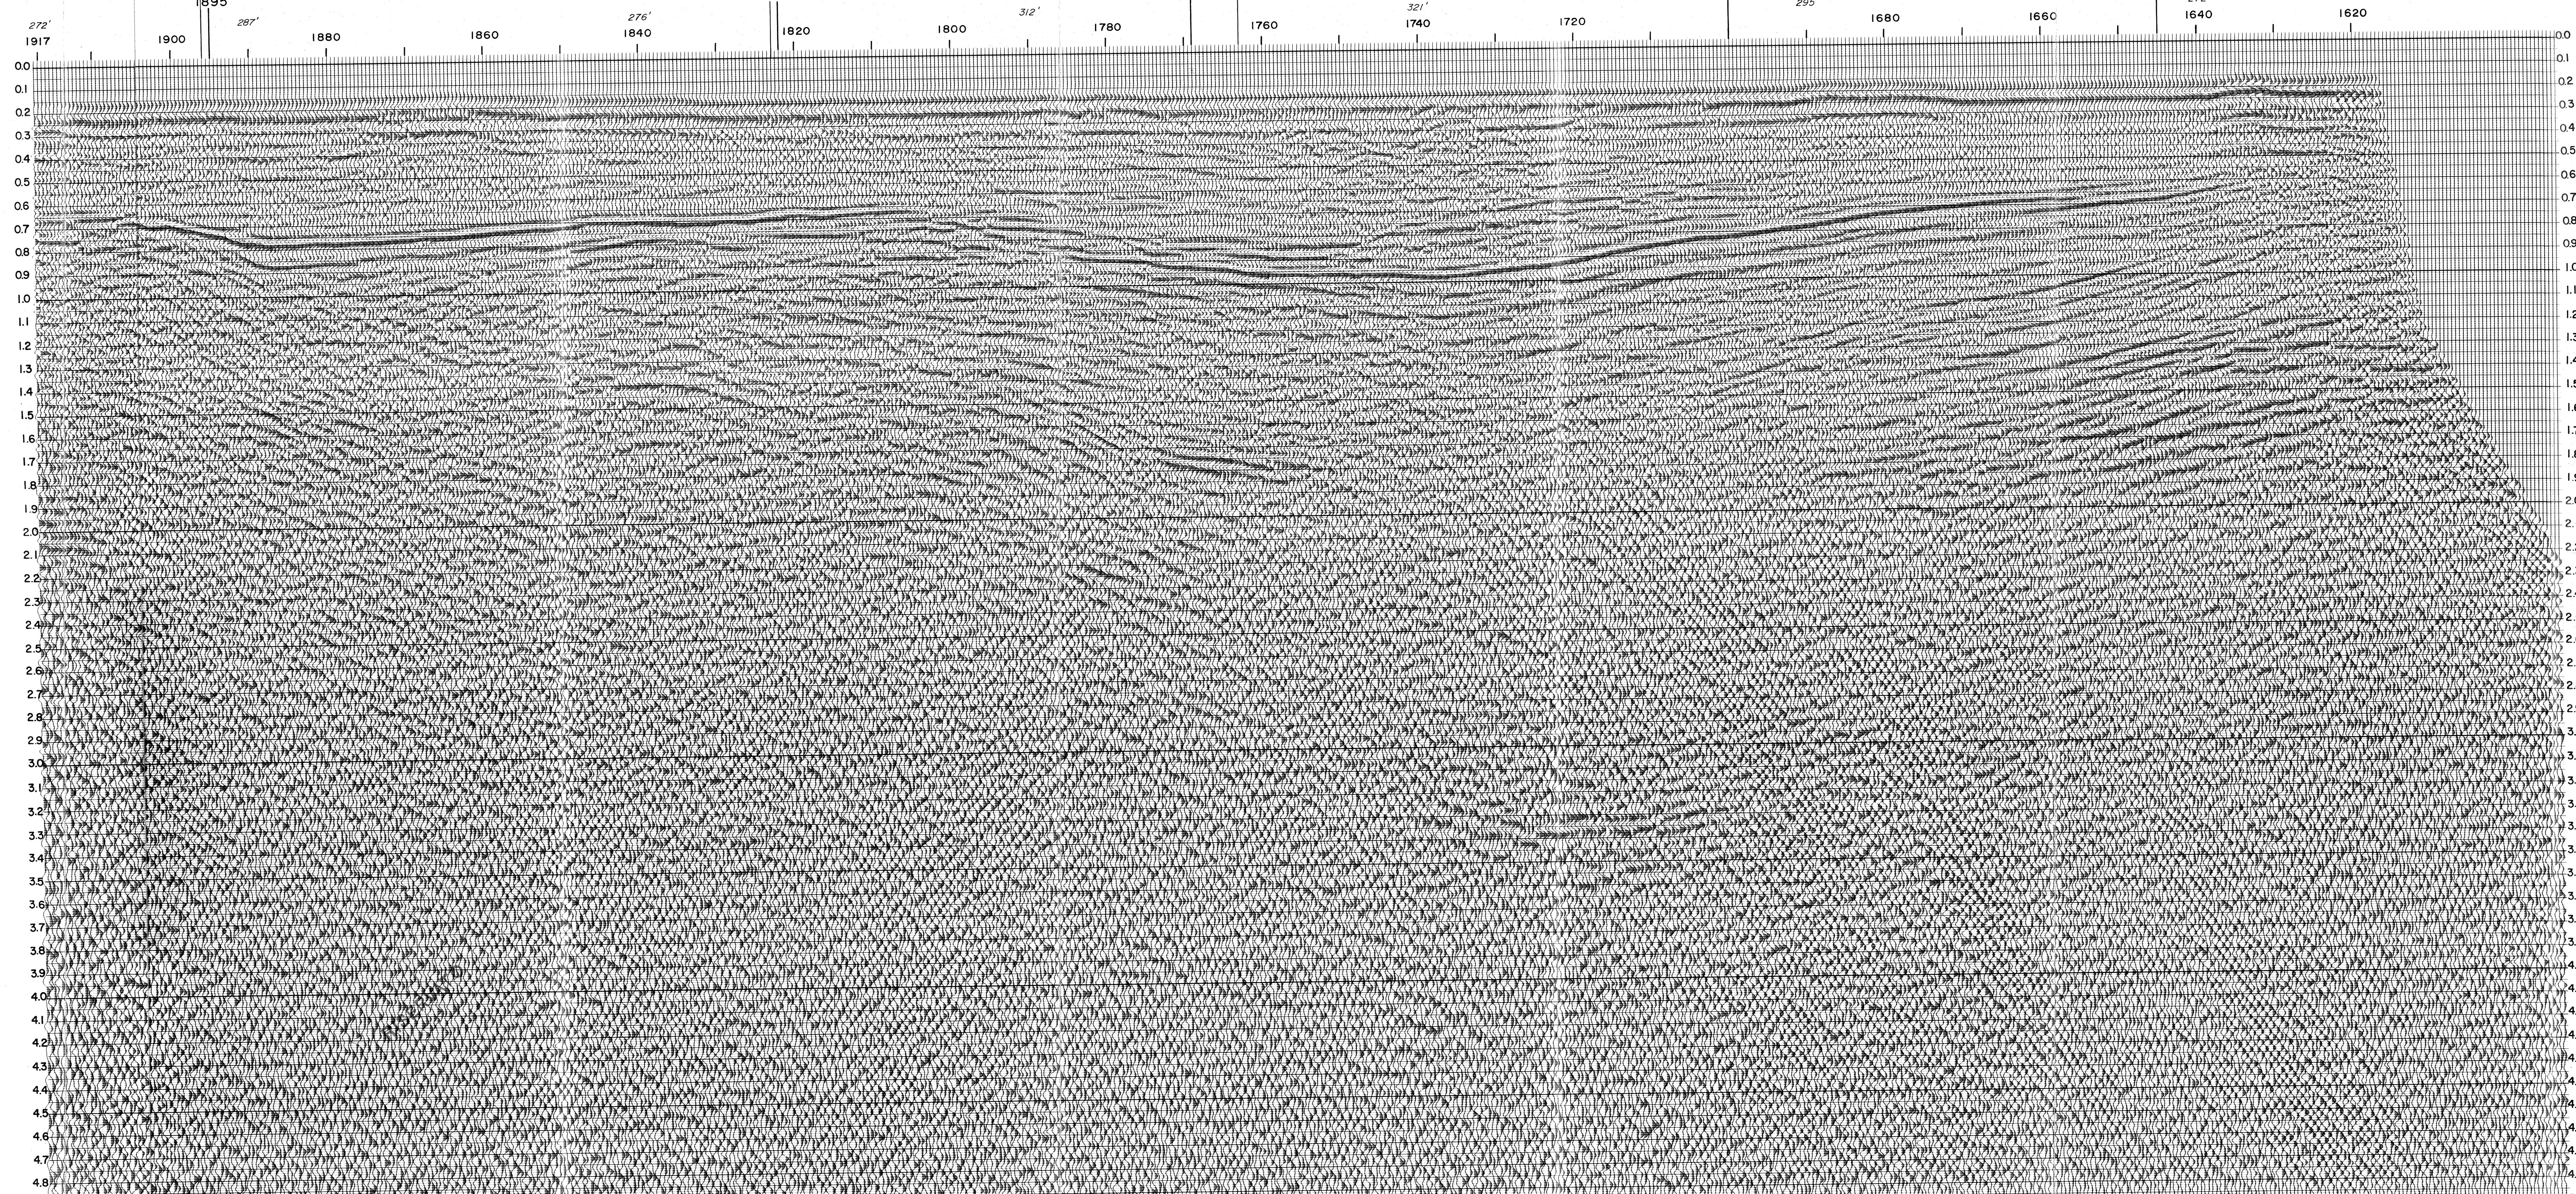

SEZIONE IDROCARBURI
di POLI
27 MAG. 1975
Prov. N. 1870
Sez. _____
Posiz. _____

SEIS CAN RISERVATO
SEIS CAN DELTA

SP. 1620-1917 FOLD 24 LINE 5B

TYRRHENIAN SEA AREA

CANADIAN SUPERIOR OIL LTD. CLIENT

T/V DECON + 2400% CDP STACK + STVF PRIMARY DIGITAL PROCESSES

RECORDING DATA

RECORDED BY SEISMO SER LTD. PARTY DATE APR / 74

ENERGY SOURCE TUNED AIRGUN ARRAY

SOURCE CONFIGURATION SAMPLE RATE 4 ms

FIELD TAPE DFS III 9 TR. GAIN BINARY

RECORD LENGTH 6.0 sec SURVEY SYSTEM LORAN C SATNAV

FILTER 8/18 - 62 Hz DIRECTION SHOT NW

CABLE LENGTH 2350 m. CABLE DEPTH #1-46 #48-46


GROUP INTERVAL 50 m GEOPHONE TYPE

OFFSET 280 m OFF. I. GEOPHONES / TRACING

GUN DEPTH 10 m GEOPHONE SPACING

FIRING INTERVAL 50 m. SP INTERVAL 50 m.

MULTIPLICITY 2400%

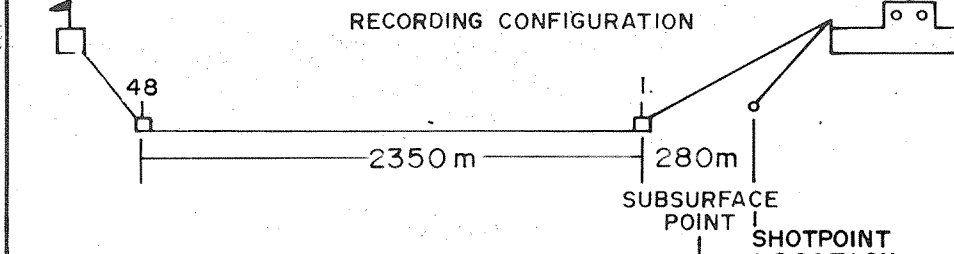

DIGITAL PROCESSES

PROCESSED BY SEISCAN DELTA LTD. DATE JUNE / 74

1 EDIT SR 4 ms DATUM SEA LEVEL

2 GAIN RECOVERY 8 STACK 2400% CDP

4 T/V DECON OPER 240 ms MULTICHANNEL FILTER

36 ms PREDICTIVE SEIS/STACK

PRE-DECON FILTERS COH/OP

SHALLOW 6-56 Hz SEIS/SCAN

DEEP 6-56 Hz

POST DECON FILTERS 10 TRACE EQUALIZATION

SHALLOW 6-56 Hz WINDOWS

DEEP 6-56 Hz

3 CDP GATHERS 9 DIGITAL FILTER

5 VELOCITY SPECTRA 11 DISPLAY

6 NMO 16 TRACES/INCH


7 MUTING (SEE VERVELS) 3.75 INCHES/SECOND

PROCESSING RUN 2

REEL 1937

JOB 51706

SPACE & TIME VARIANT DIGITAL FILTER

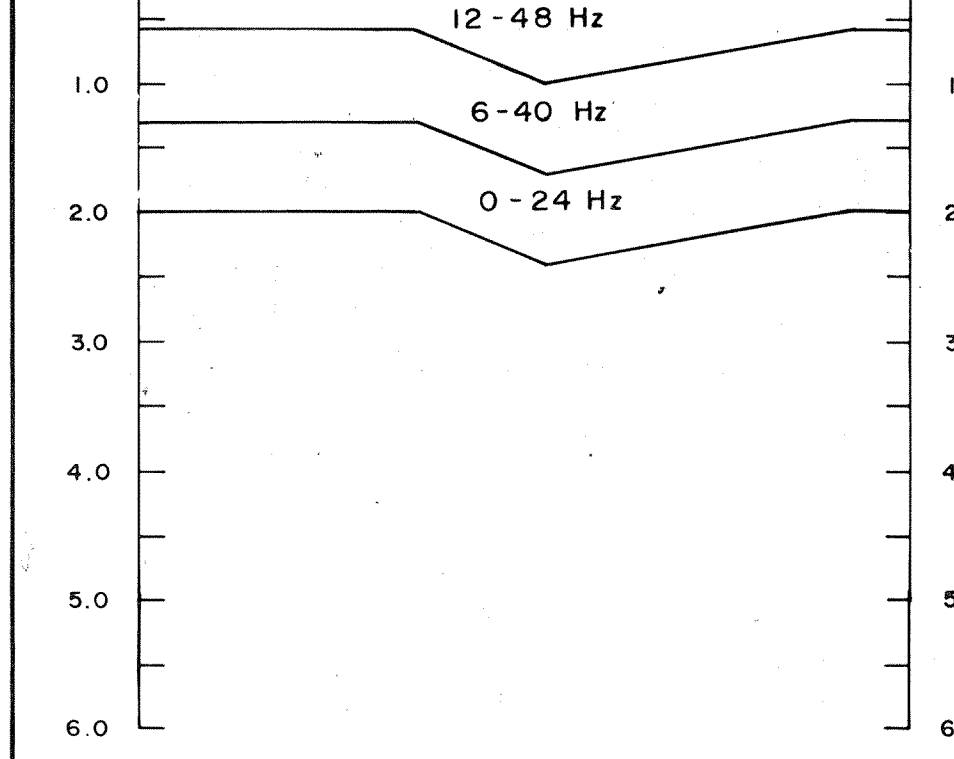

REMARKS