

SNA BPD DIVISIONE MINERARIA MILANO

Scale

AIL. n° 2 Data NOV-87 N° Arch.

Stanza di concessione "MASSERIA SASSI"

Stralcio PROFILO SISMICO TS-5-83

det MS8

A6603

TIME	AMS	VEL	DTA	INT
0.00	1800	1800		
0.35	1950	1952		
0.50	2100	2294		
0.80	2350	2977		
1.10	2550	3019		
1.45	2750	3301		
1.75	3100	4417		
2.50	3400	3811		
5.50	4700	5817		


TIME	AMS	VEL	DTA	INT
0.00	1850	1850		
0.35	2050	2052		
0.55	2200	2440		
0.80	2350	2356		
1.35	2450	3002		
1.25	2600	3277		
2.20	3200	4005		
5.50	4700	5372		

TIME	AMS	VEL	DTA	INT
0.00	1800	1800		
0.30	1900	1901		
0.45	2000	2196		
0.60	2100	2378		
0.90	2450	3031		
1.00	2600	3685		
2.00	3400	4045		
5.50	4700	5302		

TIME	AMS	VEL	DTA	INT
0.00	1800	1800		
0.30	1900	1901		
0.50	2000	2141		
0.60	2100	2542		
0.80	2300	2816		
0.90	2300	2300		
1.00	2400	3151		
1.40	3400	5105		
5.50	4700	5058		

TIME	AMS	VEL	DTA	INT
0.00	1700	1700		
0.35	1850	1852		
0.60	2100	2407		
0.80	2200	2597		
1.05	2400	3359		
1.45	3250	4813		
5.50	4700	5120		

TIME	AMS	VEL	DTA	INT
0.00	1800	1800		
0.35	1950	1952		
0.50	2100	2294		
0.80	2350	2977		
1.10	2550	3019		
1.45	2750	3301		
1.75	3100	4417		
2.50	3400	3811		
5.50	4700	5817		

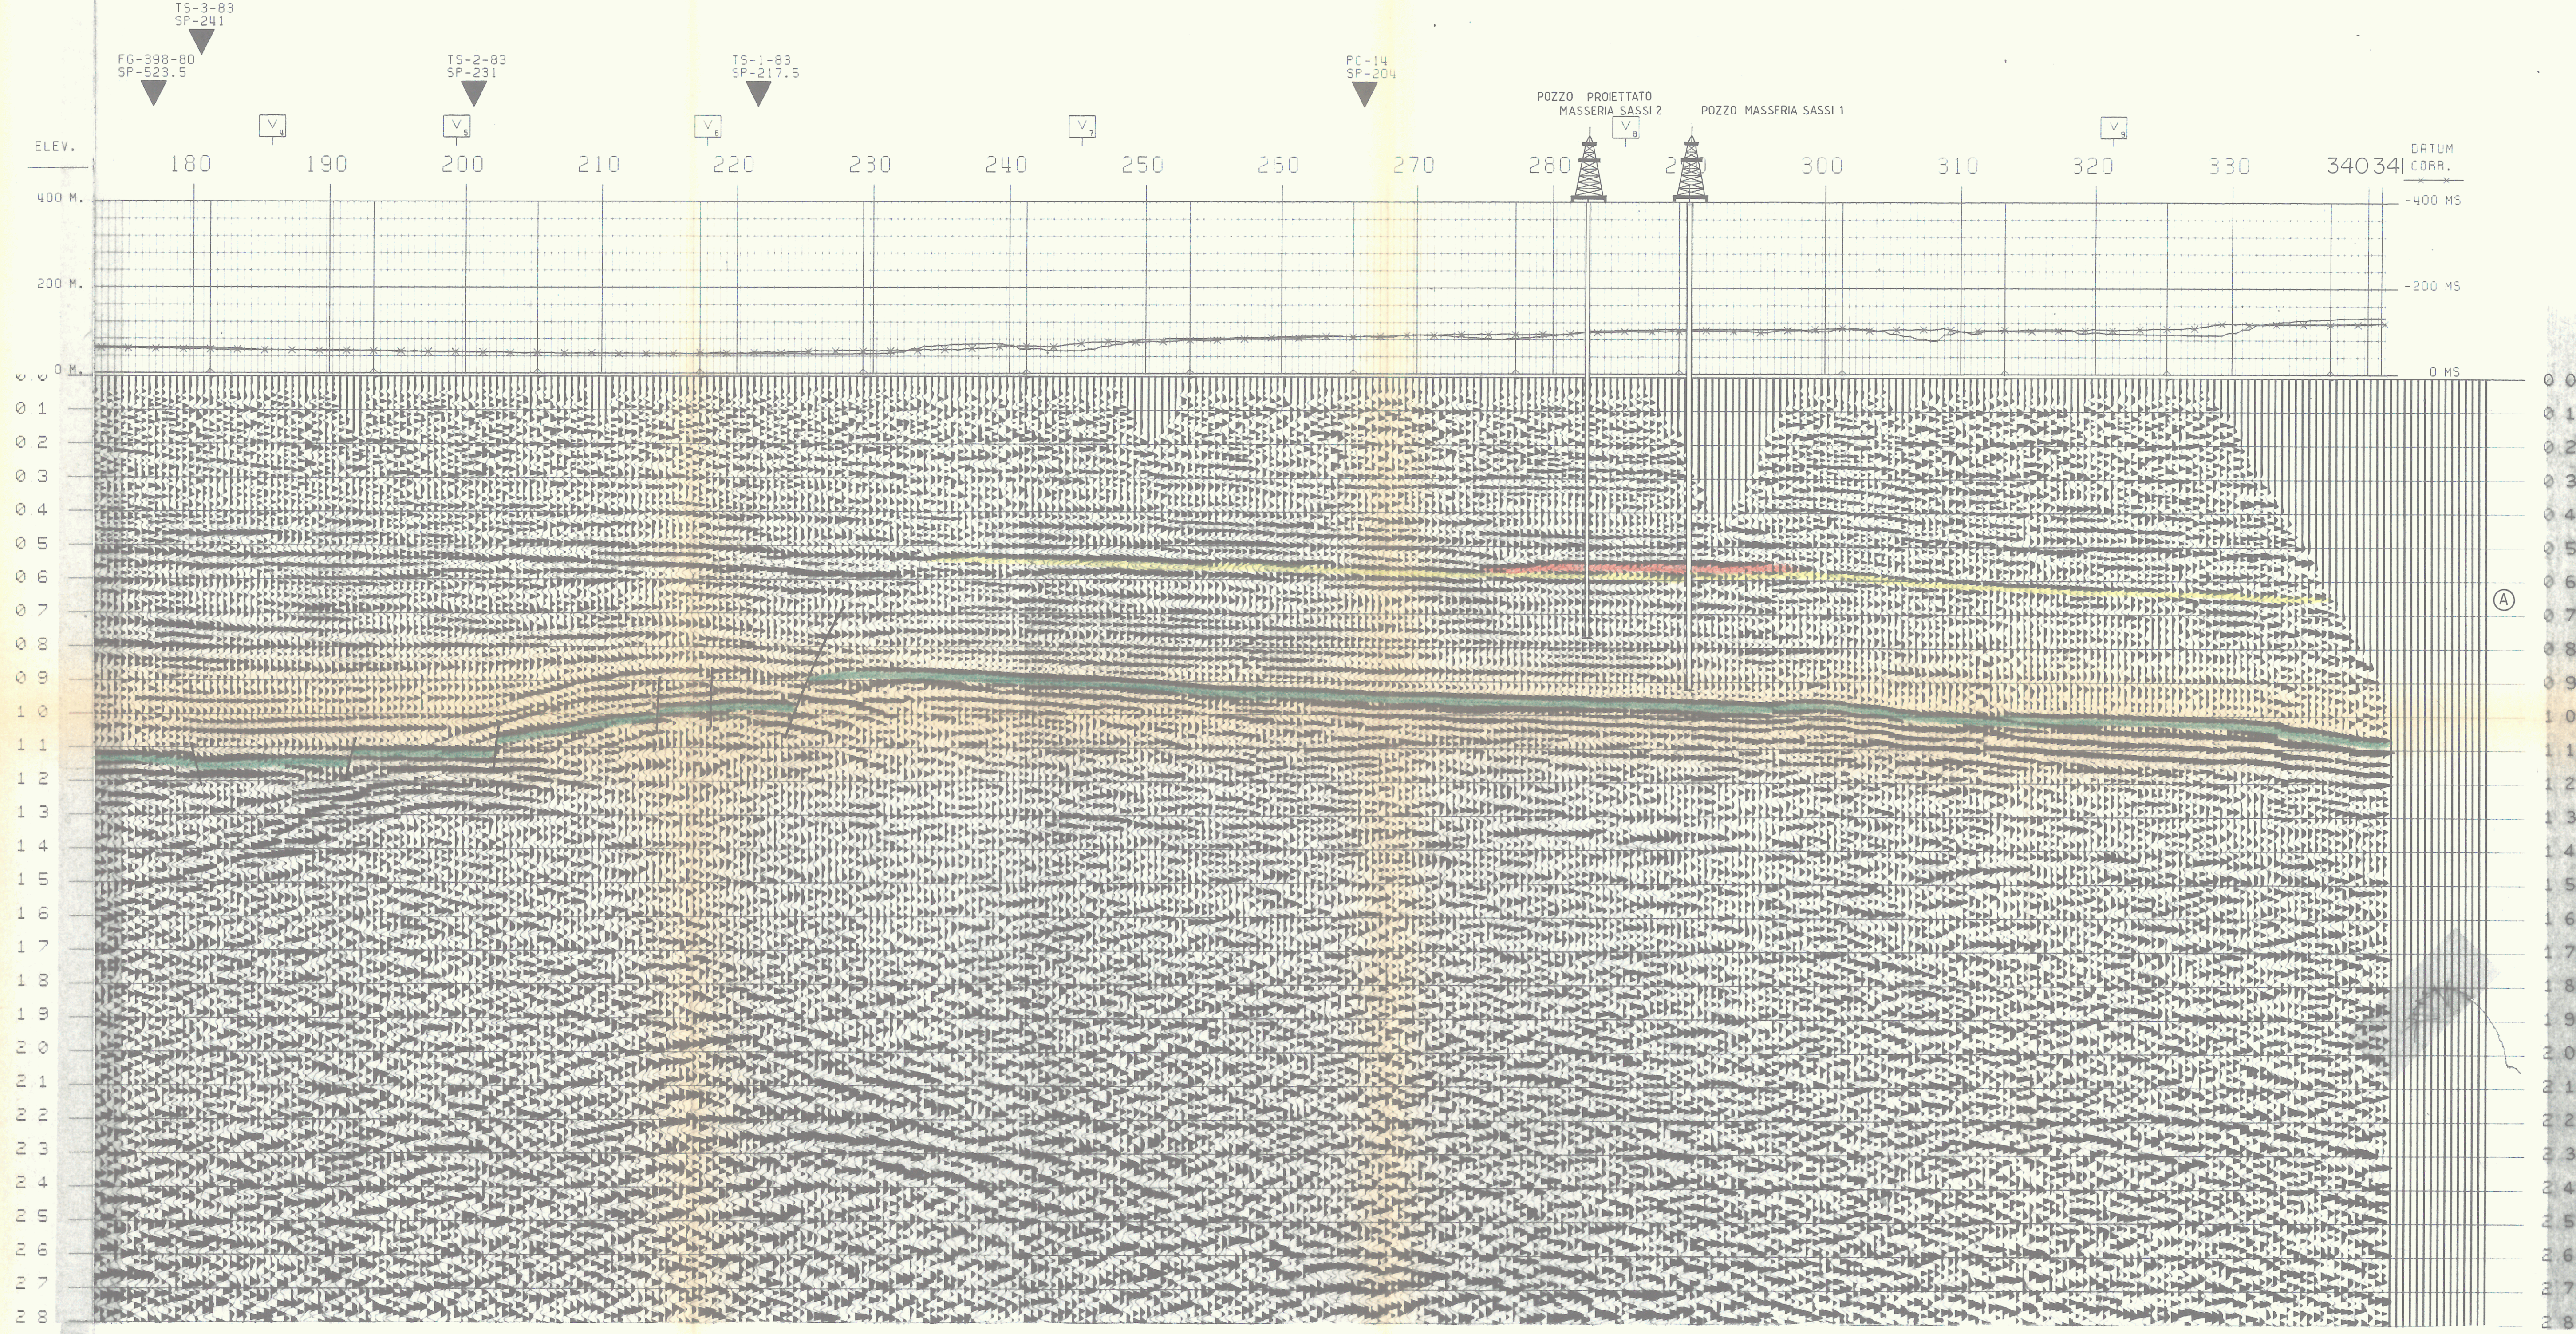

SNA WESTERN
RICERCHE GEOFISICHE

AREA ITALIA MERIDIONALE
PERMESSO T. SACCIONE

DATE SHOT: MARCH, 1983
DATE PROCESSED: APRIL, 1983

RECORDING DATA	PROCESSING SEQUENCE
PARTY NUMBER: S. T. A. D. 03	EDIT REEL N. 103366
REORDER: 03	PERMEABILITY SPREADING GAIN
GROUP INTERVAL (METERS): 10	PREPROCESSOR/PCAN
RECORD LENGTH: 1200	DECAN TYPE: MINIMUM PHASE INVERSE FILTER
RECORD LENGTH: 6500	MIN. PRED. DIST: 4MS, MAX. PRED. DIST: 140MS
SAMPLE RATE: 100	NO. OF WINDOWS: 3
SUBSURFACE COVERAGE: 750 FT	STEP 2: TO CORRELATION 3.5 SEC.
NUMBER OF GROUPS: 24	DECAN REEL N. 101927
WEATHERING VELOCITY: 500 M/S	VELOCITY ANALYSIS
STATIC COMPUTATION VELOCITY: 1800 M/S	NWD, STATICS, WTE APPLICATION
DATUM PLANE (ABOVE SEA LEVEL): 0	STRETCH DEPENDENT WTE (LOGIC)
	SURFACE CONSISTENT RESID. STATICS
	C. D.P. CONSISTENT RESID. STATICS
	COHERENCY STACK TWO POT.
	STACY REEL N. 103800
	AMS GAIN
	MIGRATION HIGH ORDER NO
	VELOCITY REDUCTION LOGIC
	TIME VARIATION FILTER
	VERTICAL & SPATIAL INTERPOLATION
	B-70 -2
	B-38 -2
	STRECH
	VERTICAL SCALE 5 M/CM
	VERTICAL SCALE TO CM/SEC
	LEGEND
	VELOCITY ANALYSIS
	INTERSECTIONS
	ANALYST: <i>[Signature]</i> DATE: 5/83

SPREAD DIMENSIONS: 30, 25M, 25M, 30, 1475M

SEISMOMETER ARRAY: X, Y, Z coordinates

GEOPHONE TYPE: SENSER SHL, 144-2

ENERGY SOURCE: ESPLOSIVO

SHOT HOLES/S.P.: 5 M

AVERAGE CHARGE/SHOT: 25 M

AVERAGE SHOT DEPTH: 25 M