


MC-346-81V

V.P. 101 TO V.P. 281



1200 PCT DBS-RAP
POLARITY NORMAL

Allegato	Data	Disegno n°
3	GENNAIO 1983	529/1

VP 101.00	
TIME	RMS VEL
0.10	1800
0.40	1900
0.50	2000
0.80	2200
1.20	2400
1.40	2450
1.60	3400
2.10	3400
5.00	4200

VP 125.00	
TIME	RMS VEL
0.10	1800
0.30	1950
0.48	2050
0.74	2300
1.20	2500
1.40	2450
1.60	2750
1.70	3000
2.70	3600
5.00	4200

VP 153.50	
TIME	RMS VEL
0.10	1700
0.32	1900
0.68	1950
1.00	2100
1.20	2500
1.40	2450
1.60	2750
1.70	3000
2.70	3600
5.00	4200



VP 176.00	
TIME	RMS VEL
0.10	1700
0.30	1750
0.86	2050
1.26	2400
1.54	2750
1.72	3200
5.00	4200

VP 188.50	
TIME	RMS VEL
0.10	1700
0.36	1850
0.60	1900
0.90	2100
1.32	2700
1.76	3250
5.00	4200


VP 213.00	
TIME	RMS VEL
0.10	1800
0.52	1950
0.90	2200
1.32	2700
1.76	3250
5.00	4200

VP 238.50	
TIME	RMS VEL
0.10	1700
0.50	1950
0.70	1950
0.94	2300
1.12	2350
1.40	2900
1.60	3250
5.00	4200

VP 255.00	
TIME	RMS VEL
0.10	1680
0.30	1750
0.50	1950
0.70	1950
0.94	2300
1.12	2350
1.40	2900
1.60	3250
5.00	4200

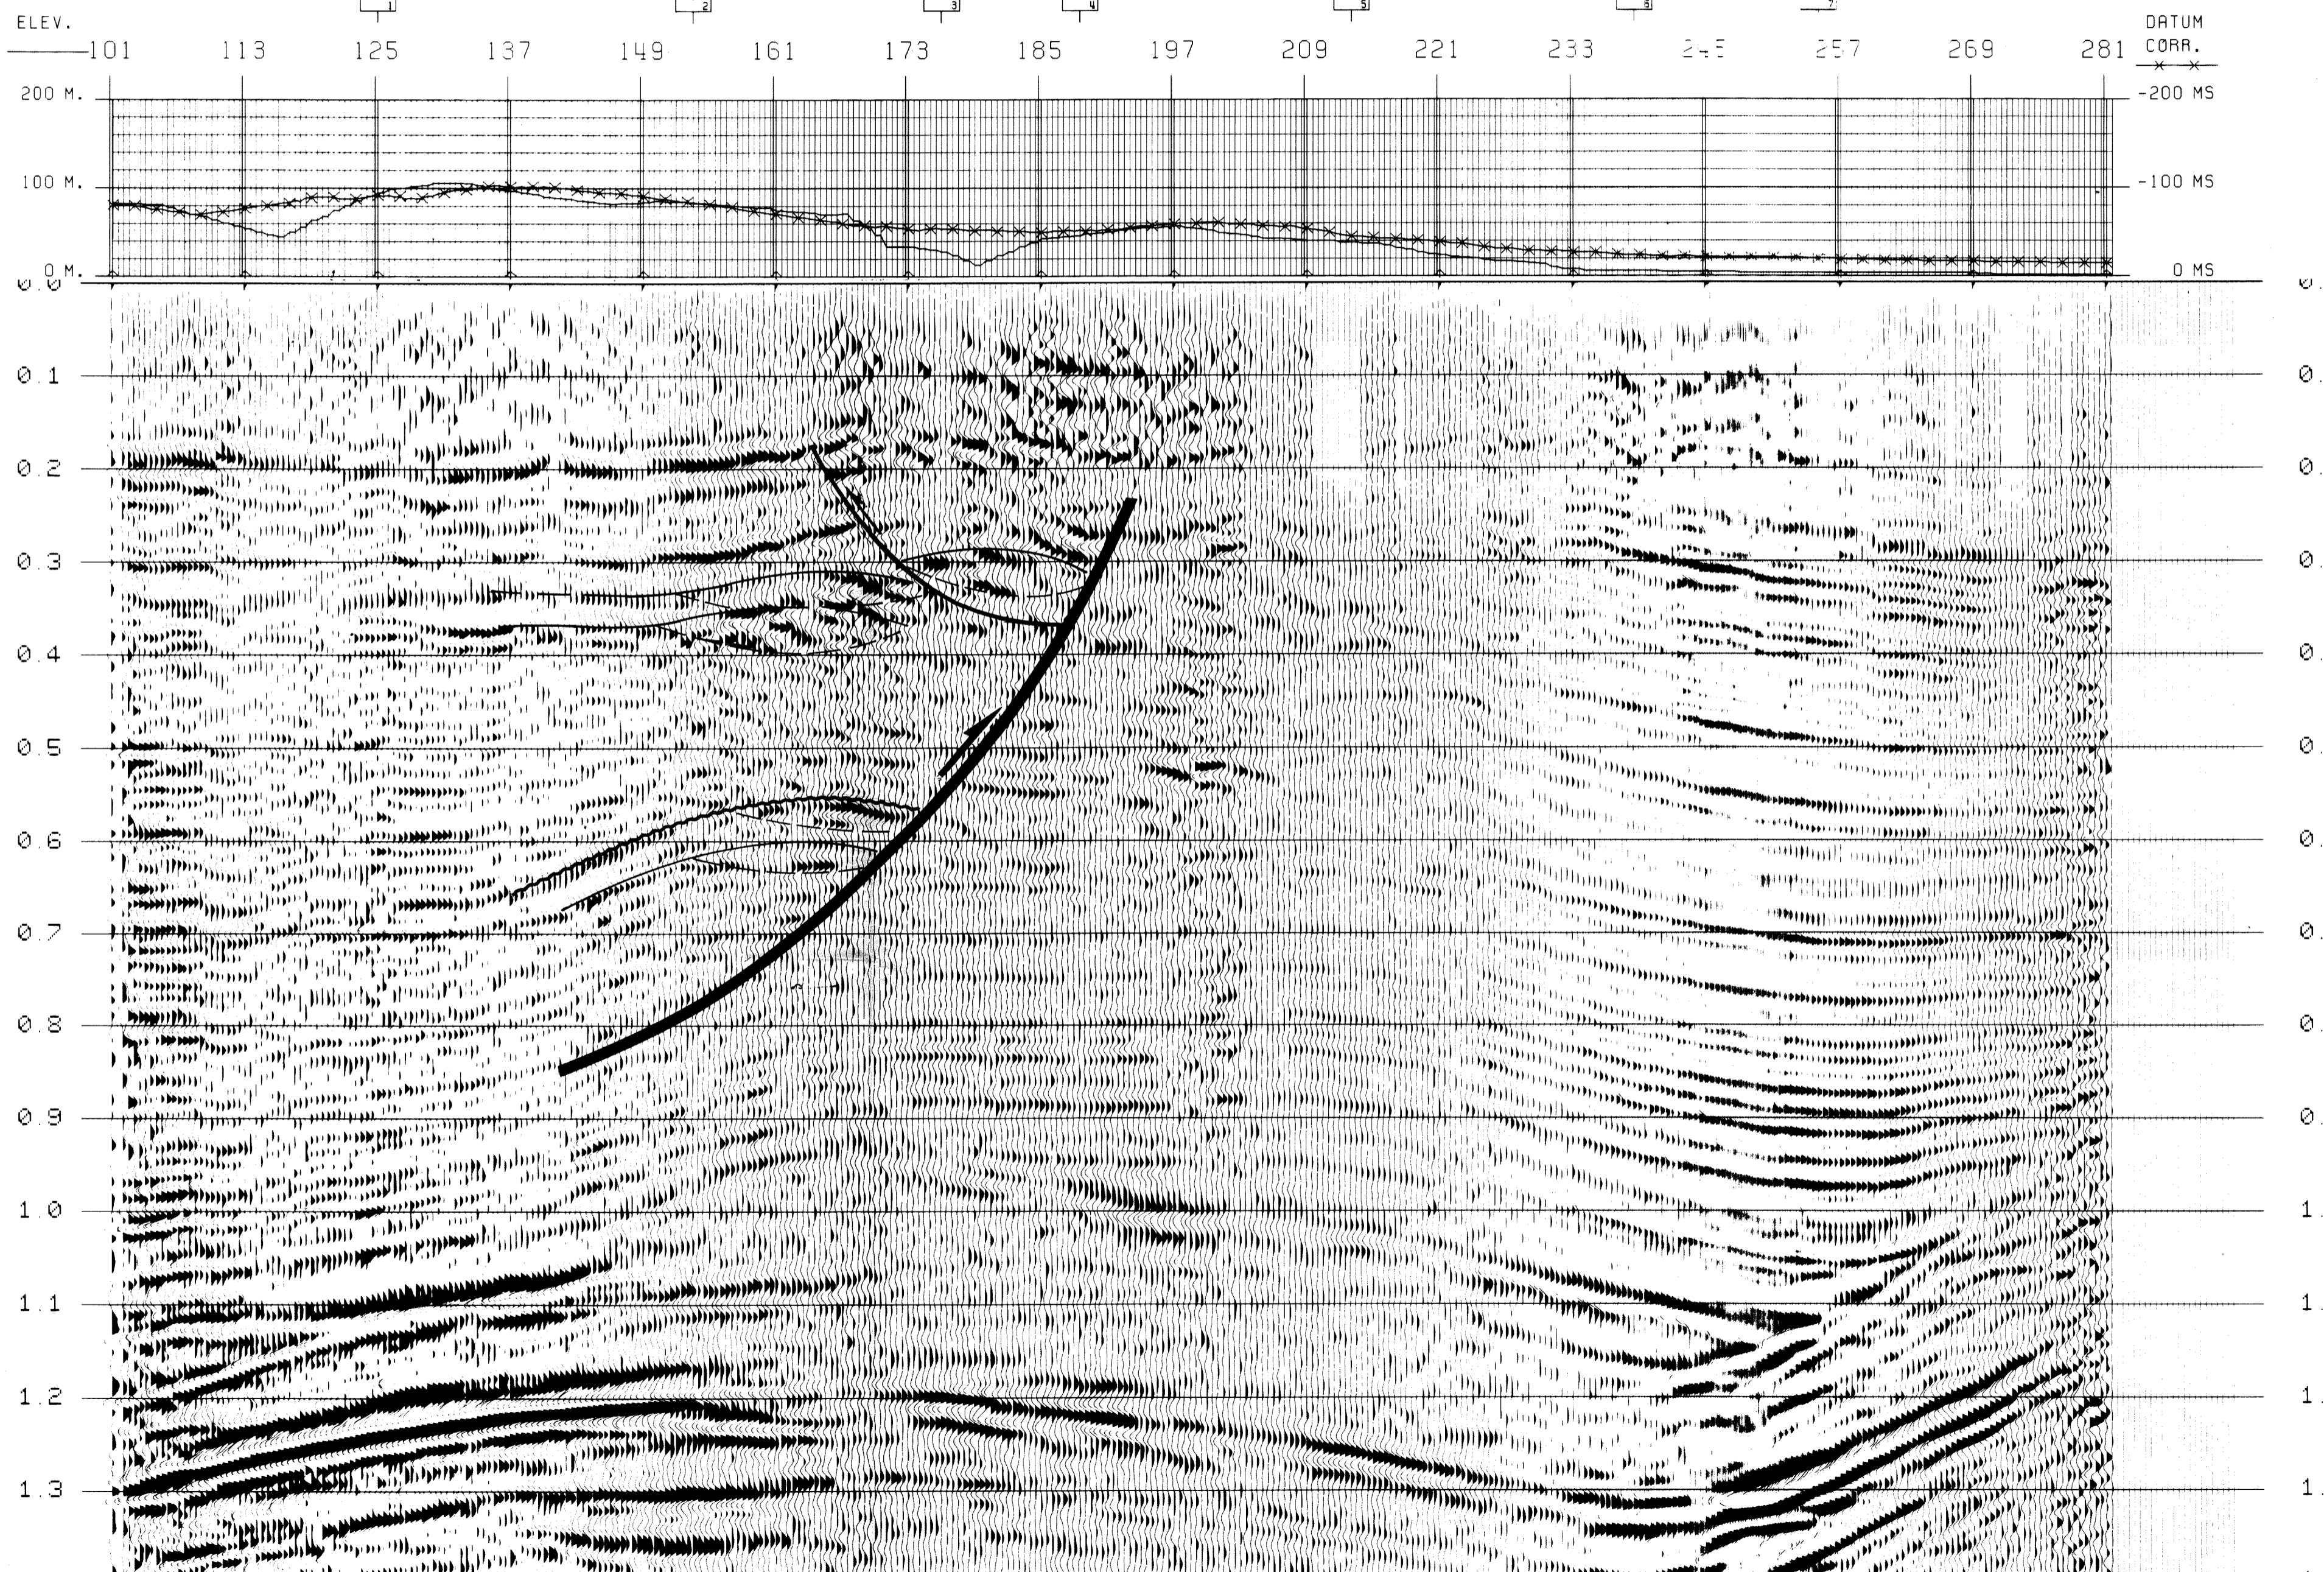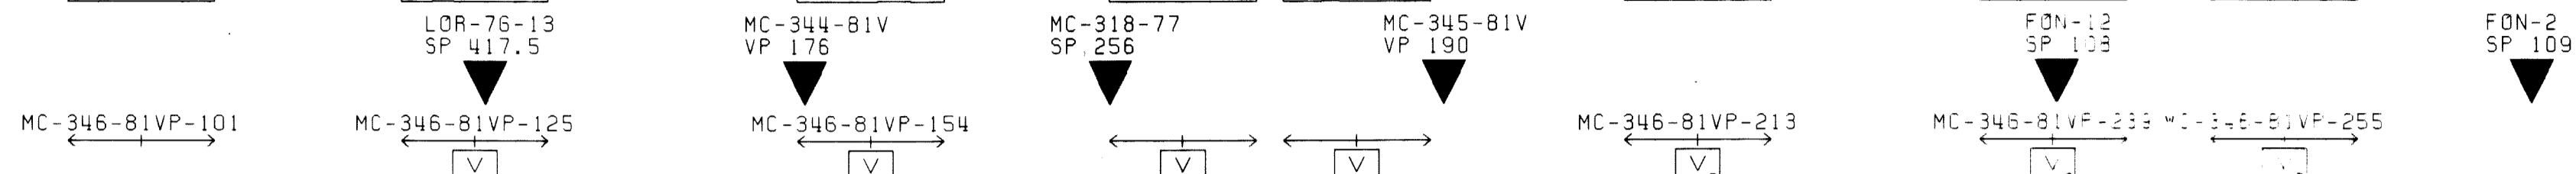

3986



AGIP

RICERCHE GEOFISICHE

AREA ITALIA-ZONA 3
PROSPECT LORETO

DATE SHOT SEPTEMBER, 1981
DATE PROCESSED DECEMBER, 1981

RECORDING DATA	PROCESSING SEQUENCE
PARTY NUMBER WAG F-81 RECORDER COBRA-2 GAIN 1. F. P. RECORDING FILTER (HZ) 12-124 NOTCH FILTER (HZ) OUT SEG POLARITY CODE=0011 RECORD LENGTH 12.45 SEC SAMPLE RATE (MS) 2	1 EDIT GEO.AMPL. SR 2MS 2 CORRELATION SR 2MS 3 GEOMETRICAL SPREADING GAIN 4 PREPROCESSOR/DECON
SUBSURFACE COVERAGE 1200 PCT GROUP INTERVAL (METERS) 30 NUMBER OF GROUPS 48	DECON TYPE MINIMUM PHASE INVERSE FILTER MIN. PRED. DIST 12-140MS W.L. 1PCT STOP AUTOCORR. 5800MS NO. OF WINDOWS 3 DECON REEL N. 105797
WEATHERING VELOCITY 500 M/S STATIC COMPUTATION VELOCITY 2500 M/S DATUM PLANE (ABOVE SEA LEVEL) 0	5 SURF. CONSISTENT RESID. STATICS. 6 VELOCITY ANALYSIS 7 NMO, STATICS, MUTE APPLICATION. STRETCH DEPENDENT MUTE 130PCT
UPWARD GROUND MOTION = NEGATIVE NUMB. ON TAPE	8 SURF. CONSISTENT RESID. STATICS. 9 CDP CONSISTENT RESID. STATICS 10 STACK 1200PCT STACK REEL N. 105303
SEISMOMETER ARRAY X 000000000000 000000000000	11 DECAY AMPLITUDE COMPENSATION MIGRATION HI ORDER EXPLICIT TIME VARIANT FILTER TIME VARIANT FILTER +RMS GAIN
GEOPHONE TYPE SENSOR SM4 GEOPHONE FREQUENCY 14 HZ GEOPHONE/GROUP 24	.05 20-90 HZ 18/48DB .30 16-90 HZ 18/48DB .80 16-80 HZ 18/48DB 2.0 14-60 HZ 18/48DB 6.0 14-48 HZ 18/48DB
V.P. PATTERN ENERGY SOURCE VIBROSEIS VIBRATORS/V.P. 4 SWEEP/V.P. 16 SWEEP (HZ) 14-84	PLOT DIRECTION L. TO R. NEGATIVE NUMBERS = WHITE TROUGHS
SPREAD DIMENSIONS X = 40 M	LEGEND V VELOCITY ANALYSIS