


PC-3
S.P. 322 TO S.P. 415



600% DBS-TVF

TIME	MS	VEL	DIR	INT
0.02	1600	1600		
0.05	2100	2114		
0.08	2200	2497		
0.14	2400	3119		
1.18	2400	2400		
1.22	2500	4152		
1.80	2800	3841		
3.00	3700	4441		
5.00	4000	4412		

TIME	MS	VEL	DIR	INT
0.02	1800	1800		
0.05	2100	2118		
0.08	2200	2670		
0.14	2400	3119		
1.18	2400	2400		
1.22	2500	3082		
1.44	2700	3613		
1.80	3100	3445		
3.00	3700	4451		
5.00	4000	4412		

TIME	MS	VEL	DIR	INT
0.02	1850	1850		
0.05	2100	2082		
0.08	2200	2497		
0.14	2400	2973		
1.18	2400	2400		
1.22	2500	3014		
1.44	2700	3613		
1.80	3100	3445		
3.00	3700	4565		
5.00	4000	4412		

TIME	MS	VEL	DIR	INT
0.02	1950	1950		
0.05	2100	1986		
0.08	2200	2497		
0.14	2400	2813		
0.90	2950	2989		
1.10	3000	2843		
1.30	2600	2991		
1.45	2500	3240		
2.00	3200	4556		
3.00	3700	4538		
5.00	4000	4412		


TIME	MS	VEL	DIR	INT
0.02	1700	1700		
0.05	2100	2016		
0.08	2200	2000		
0.14	2400	2375		
1.00	3300	2968		
1.10	3300	2601		
1.25	2500	3104		
1.80	3100	4549		
1.85	3100	3900		
3.00	3800	4089		
5.00	4100	4513		

TIME	MS	VEL	DIR	INT
0.02	1700	1700		
0.05	2100	2016		
0.08	2200	2000		
0.14	2400	2375		
1.00	3300	2968		
1.10	3300	2601		
1.25	2500	3104		
1.80	3100	4549		
1.85	3100	3900		
3.00	3800	4089		
5.00	4100	4513		

PC-6
SP-483-484

PC-5
SP-425

PC-4
SP-240

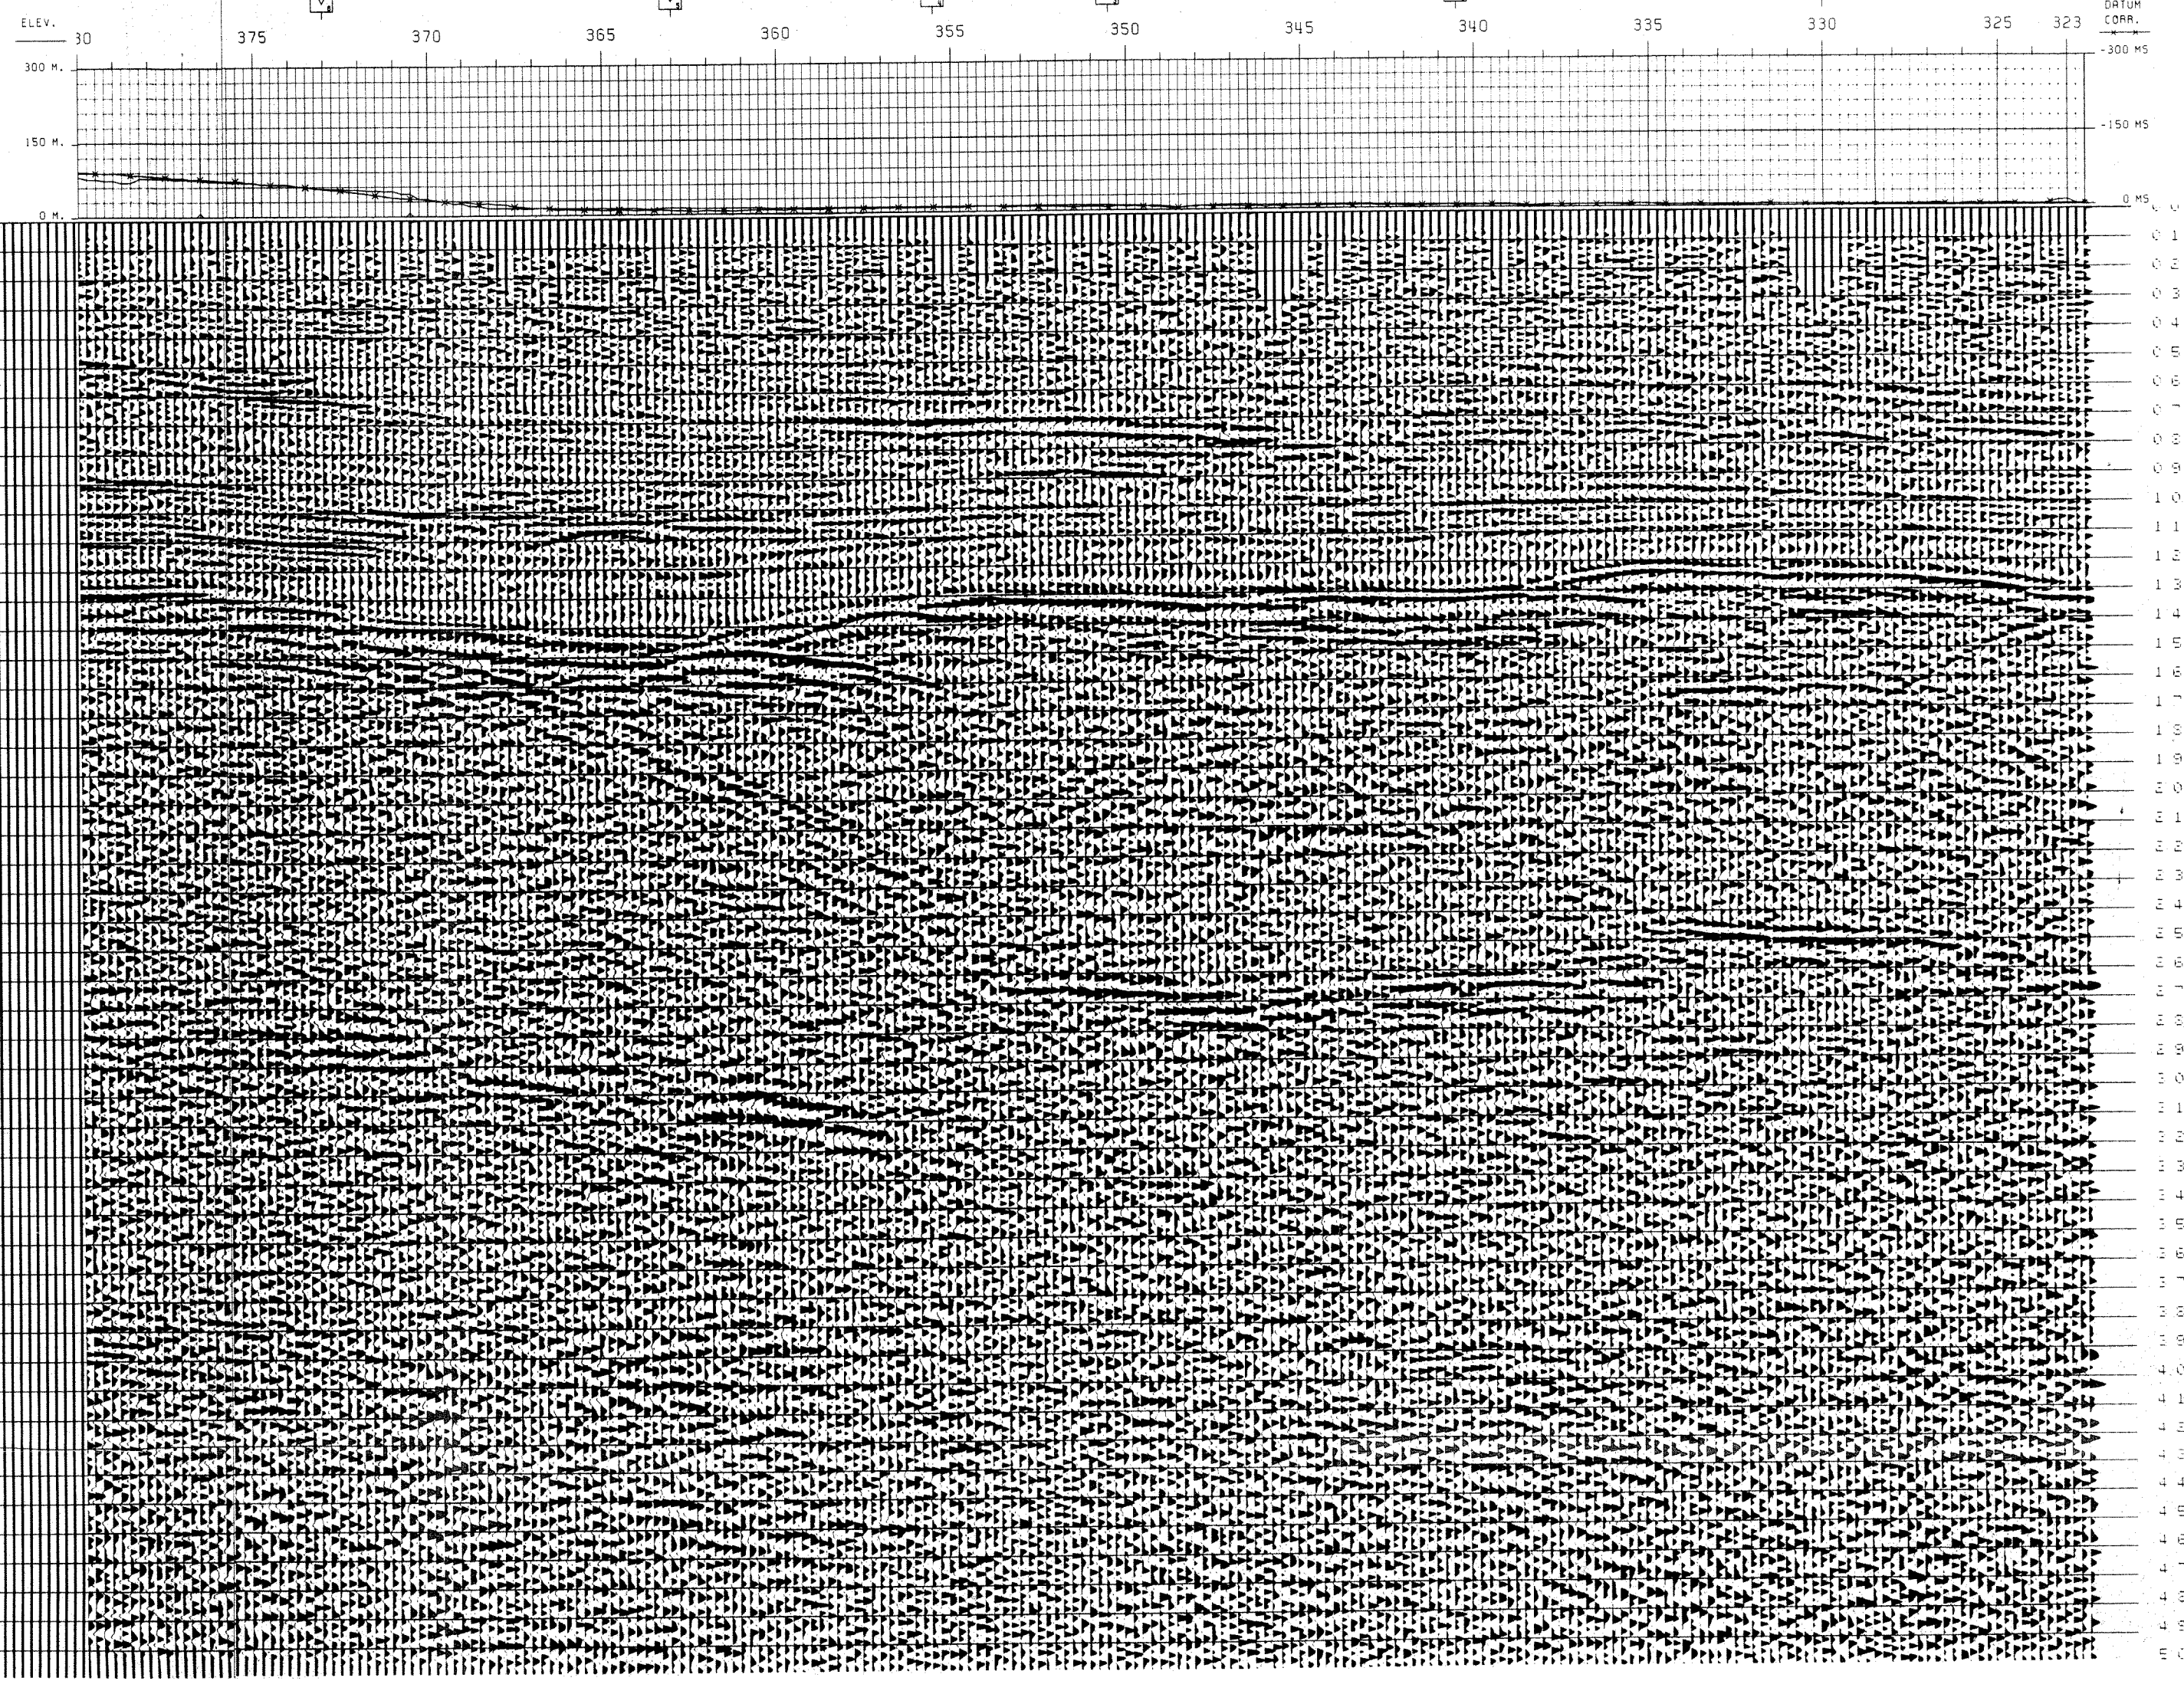

SNIA WESTERN RICERCHE GEOFISICHE

AREA ITALIA CENTRALE
PERMESSO CAMPOMARINO

DATE SHOT: OCTOBER, 1974
DATE PROCESSED: FEBRUARY, 1983

RECORDING DATA	PROCESSING SEQUENCE
PART NUMBER: 005-104 RECORDER: R.C.C. RECORDING FILTER: 12/50 RECORD LENGTH: 5 SEC SAMPLE RATE (MS): 2 SUBSURFACE COVERAGE: 600 PCT GROUP INTERVAL (METERS): 25 NUMBER OF GROUPS: 24 WEATHERING VELOCITY: 2000 M/S STATIC COMPUTATION VELOCITY: 2000 M/S DATUM PLANE (ABOVE SEA LEVEL): 0	EDIT GEO. AMPL. SR QMS LEN. SSEC. EDIT REEL N. 100794 PREPROCESSOR/DECON DECON TYPE: MINIMUM PHASE INVERSE FILTER MIN. PRED. DIST: 15-24, MAX. PRED. DIST. 100MS NO. OF WINDS: 2 STOP AUTOCORRELATION 4.0SEC. DECON REEL N. SURFACE CONSISTENT RESID. STATICS. VELOCITY ANALYSIS ANM. STATICS, MUTE APPLICATION STRETCH DEPENDENT MUTE 1/4PCT SURFACE CONSISTENT RESID. STATICS. COHERENCY STACK 600 PCT. STA REEL N. 106455 RMS GAIN TIME VARIANT FILTER VERTICAL & SPATIAL INTERPOLATION 15-54 HZ 15-40 HZ 8-30 HZ TRACE INTERPOLATION NO C. I. FROM 75 M. TO 50 M. MIGRATION HIGH ORDER NO FLATBACK HORIZONTAL SCALE 8 CM./KM. VERTICAL SCALE 10 CM./SEC

LEGEND
 VELOCITY ANALYSIS
 INTERSECTIONS
 ANALYST: *[Signature]* DATE: 2.83

LINE LOCATION MAP