MTI
LINE 45
SP 257-0
LP I-II
24 FOLD CDPSUM
REPROCESSED

MINERARIA TEXAS ITALIAN

AREA DR-20 (ADRIATIC SEA) LINE NO. 45 SP's 257-0, LP I-II

PROCESSING

- [x] EXPONENTIAL GAIN RATE 48 db/sec GATE 0-3.0 sec
- [x] VERTICAL STACK TWO OR ONE
- [x] NORMAL MOVEOUT
- [x] T-X DECON [ ] MULTICHANNEL DECON
  INPUT DELAY FILTER 3 WHITE NOISE 1%
  PREDICTION DISTANCE 1
  DESIGN GATES NEAR OFFSET 200-2,300, 1,700-3,800, 3,200-6,900 sec
  DESIGN GATES FAR OFFSET 200-2,300, 1,700-3,800, 3,200-6,900 sec
  SP NO FILTERS WHITE NOISE
  FILTER LENGTH ms
  DESIGN GATES NEAR OFFSET
  DESIGN GATES FAR OFFSET
- [x] VELOCITY ANALYSIS
- [ ] RESIDUAL NORMAL MOVEOUT
- [x] COMMON DEPTH POINT GATHER
- [x] COMMON DEPTH POINT SUM 24 FOLD
- [x] DIGITAL FILTER NO FILTERS 3
  BAND PASS 15 - 45 cps TIME 0 - 500 sec
  10 - 40 cps 1800 - sec
  10 - 25 cps 2,100 - 5,000 sec
- [x] TRACE AMPLITUDE EQUALIZATION
- [ ] SINGLEFOLD DISPLAY
- [x] VELOCITY ANALYSIS

FIELD DATA

RECORDING INST. TI HUDOO, DFS III, 48 TRACE
RECORDING FILTERS 8-62 cps
SPREAD CONFIGURATION - END ON 585-8295' OFFSET
GAIN INFORMATION - BINARY GAIN
ARRAY - 19 GUNS
2-80 in³ 12-40 in³ 6-20 in³
6-40 in³ 5-20 in³

RECORDED AND PROCESSED BY
digicon inc.
HOUSTON, TEXAS
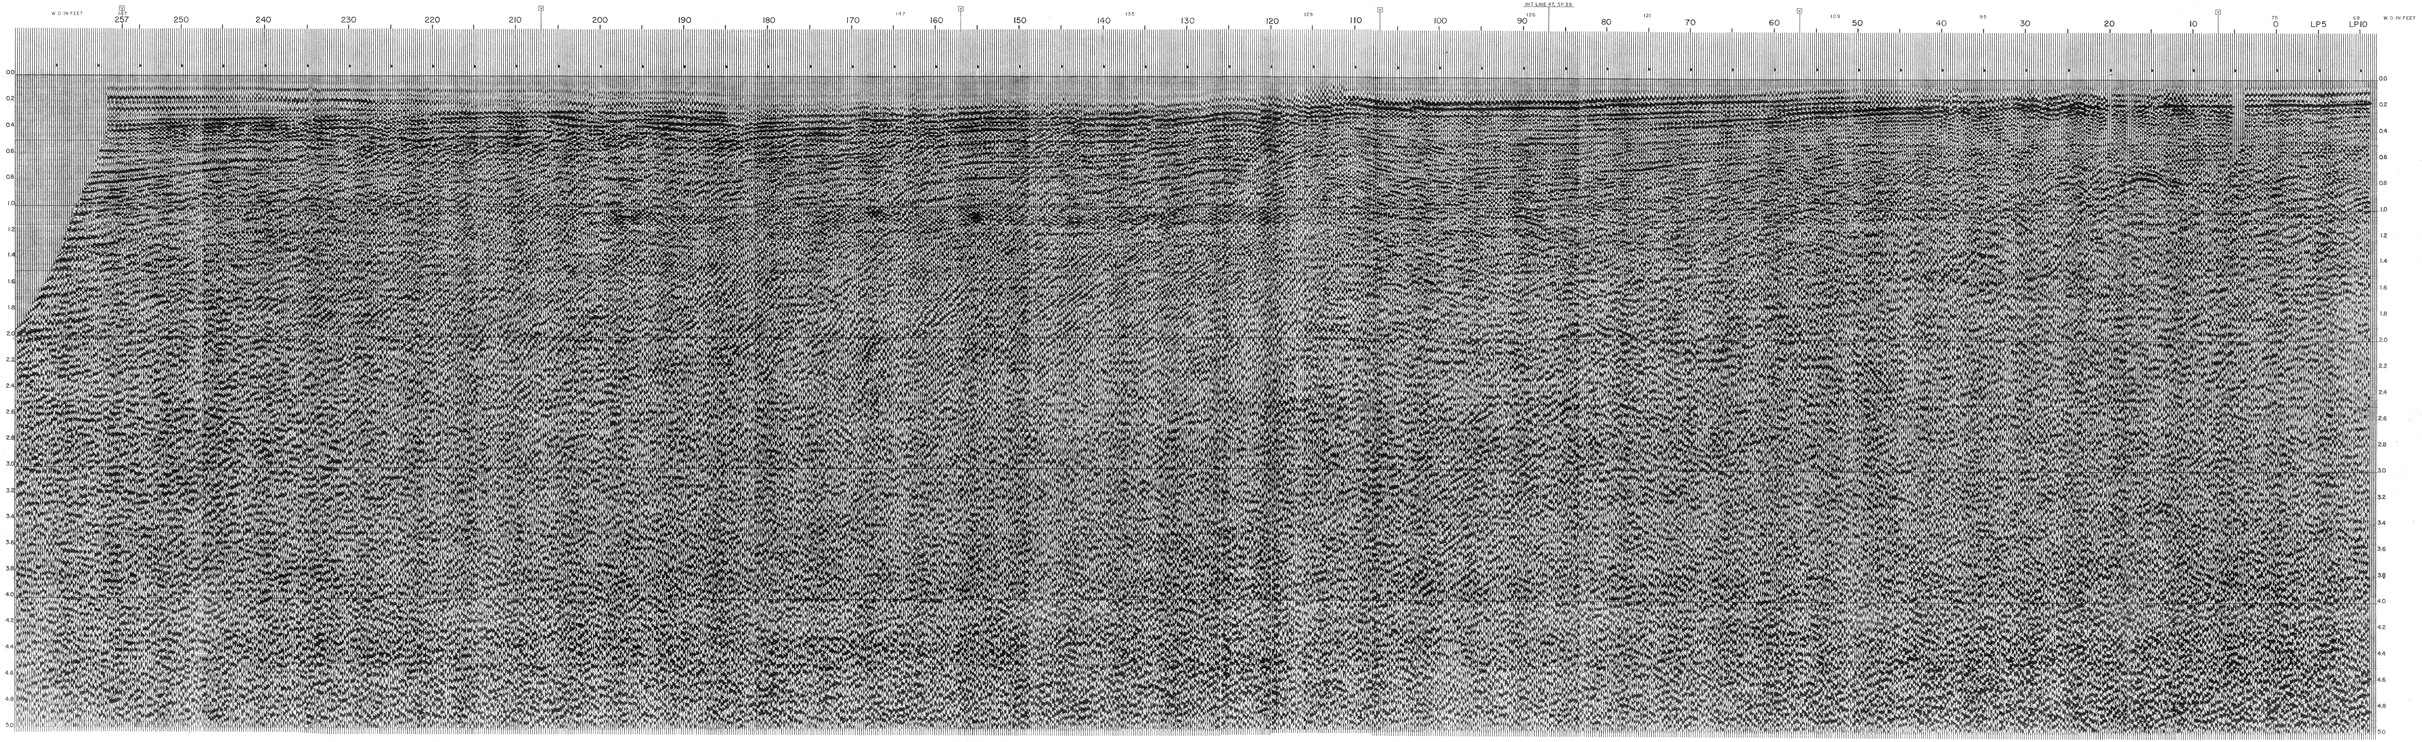
MTI
LINE 45
SP 257-0
LP I-II
24 FOLD CDPSUM
REPROCESSED