all. 20

MTI
LINE 46
SP 281-2
24 FOLD CDPSUM

KILOMETER

SOUTHEAST

MINERARIA TEXAS ITALIAN

AREA DR-23 (ADRIATIC SEA) LINE NO. 46 SP's 281-1

PROCESSING

- [ ] EXPONENTIAL GAIN RATE 5.8 db/sec GATE 0-3.0 Sec.
- [x] VERTICAL STACK 3 NO. ON ONE
- [x] NORMAL MOVEOUT
- [ ] T-V DECON [ ] MULTICHANNEL DECON
  SP 281-1 NO. FILTERS 3 WHITE NOISE 1%
  FILTER LENGTH 210 ms
  DESIGN GATES NEAR OFFSET
  200-2.500, 1.700-3.900, 3.200-6.900 Sec
  DESIGN GATES FAR OFFSET
  200-2.500, 1.700-3.800, 3.200-6.900 Sec
  SP NO. FILTERS WHITE NOISE
  FILTER LENGTH ms
  DESIGN GATES NEAR OFFSET
  DESIGN GATES FAR OFFSET
- [x] VELOCITY ANALYSIS
- [ ] RESIDUAL NORMAL MOVEOUT
- [x] COMMON DEPTH POINT GATHER
- [x] COMMON DEPTH POINT SUM 24 FOLD
- [x] DIGITAL FILTER NO. FILTERS 4
  BAND PASS 15 - 45 cps THR 0 - 500 mv
  10 - 40 cps 1100 - 500 mv
  10 - 25 cps 2.200 - 3.900 mv
- [x] TRACE AMPLITUDE EQUALIZATION
- [ ] SINGLEFOLD DISPLAY
- [x] VELOCITY ANALYSIS

FIELD DATA

RECORDING INST TI 11,000 , DFS III 48 TRACE
RECORDING FILTERS 8-62 cps
SPREAD CONFIGURATION - END ON 165'-828' OFFSET
GAIN INFORMATION - BINARY GAIN
ARRAY - 19 GUNS
2 - 80 IN³ (2-40) 6 - 20 IN³
6 - 40 IN³ 5 - 20 IN³

RECORDED AND PROCESSED BY
digicon inc.
houston, texas
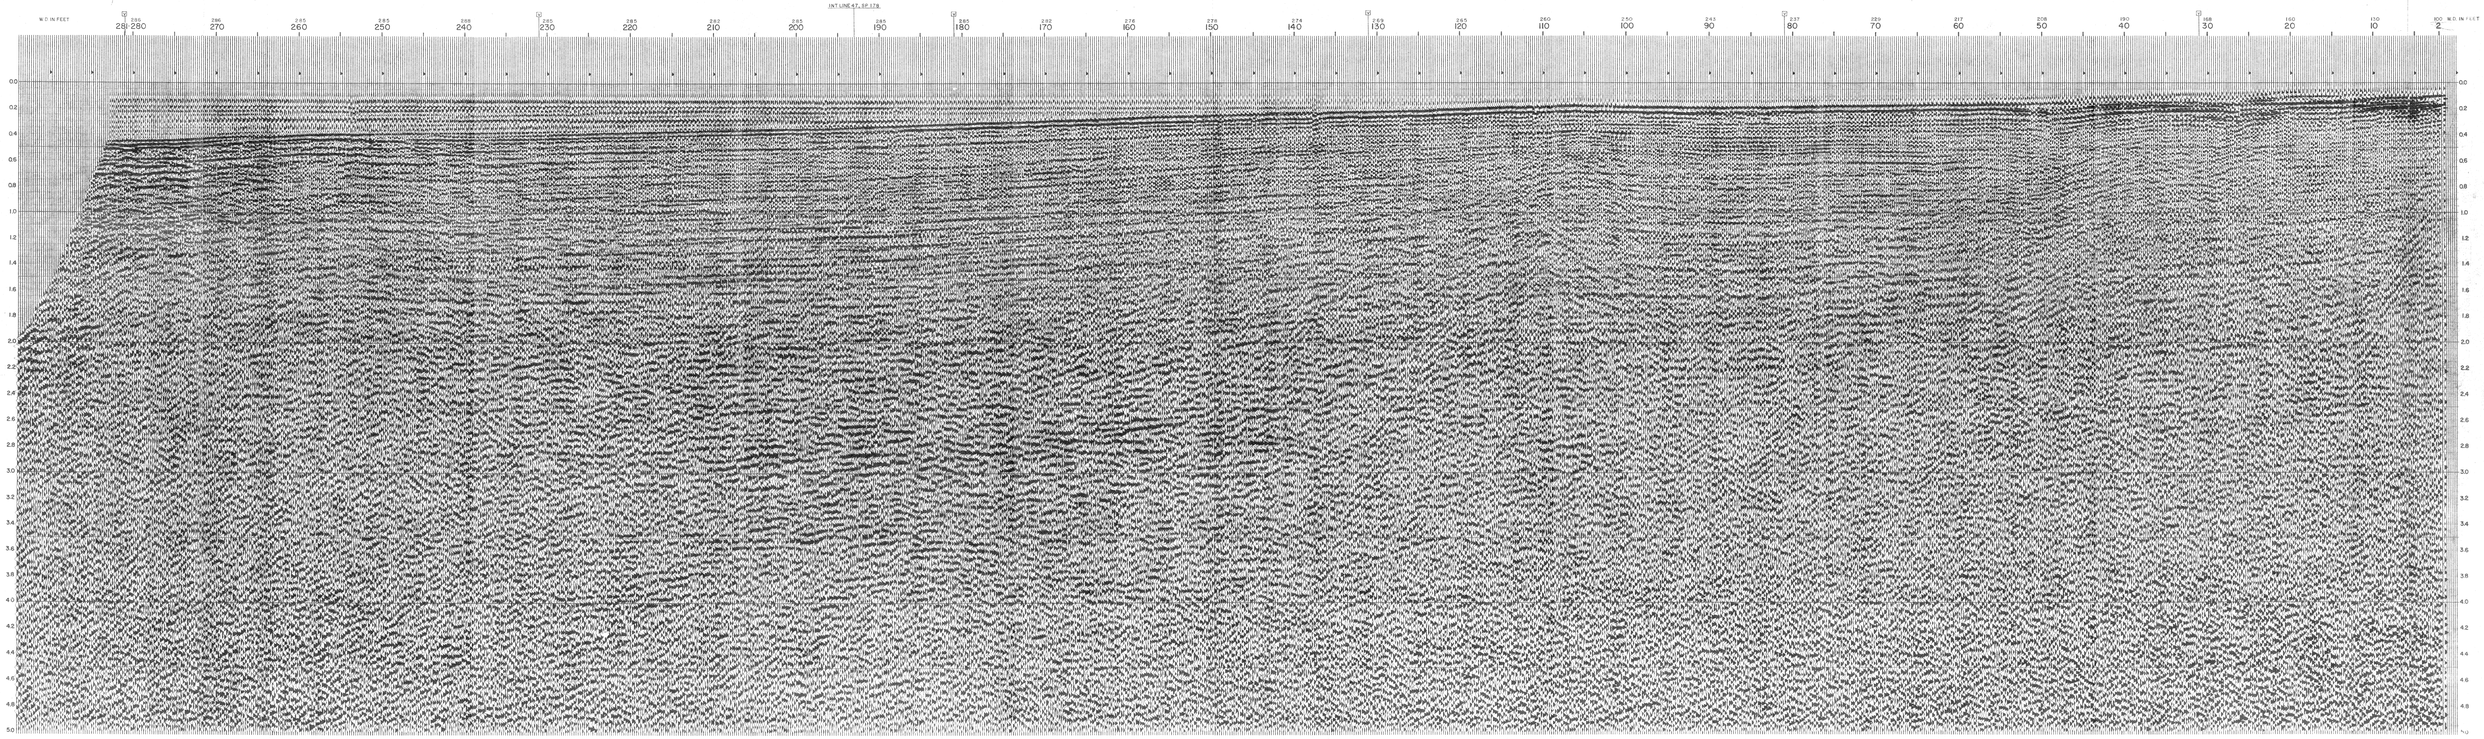
MTI
LINE 46
SP 281-2
24 FOLD CDPSUM