all.21

MTI
LINE 47
SP 293-15
24 FOLD CDPSUM

KILOMETER

NORTHEAST

MINERARIA TEXAS ITALIAN

AREA DR-23 (ADRIATIC SEA) LINE NO. 47 SP's 293-15

PROCESSING

- [1] EXPONENTIAL GAIN RATE 5DB/SEC, GATE 0-3.0 SEC
- [ ] VERTICAL STACK ___ TWO ___ ON ___ ONE
- [X] NORMAL MOVEOUT
- [X] T.V. DECON [X] MULTICHANNEL DECON
  - up 80-15 NO FILTERS 3 WHITE NOISE 1%
  - FILTER LENGTH 200 ms
  - DESIGN GATES NEAR OFFSET 300-2.500, 1.500-1.700, 3.200-4.900 Sec
  - DESIGN GATES FAR OFFSET 200-1.900, 1.700-3.500, 3.200-4.900 Sec
  - SP ___ NO FILTERS ___ WHITE NOISE ___
  - FILTER LENGTH ___ ms
  - DESIGN GATES NEAR OFFSET ___
  - DESIGN GATES FAR OFFSET ___
- [X] VELOCITY ANALYSIS
- [ ] RESIDUAL NORMAL MOVEOUT
- [X] COMMON DEPTH POINT GATHER
- [X] COMMON DEPTH POINT SUM 24 FOLD
- [X] DIGITAL FILTER NO FILTERS 3
  - BAND PASS 10-25 cps TIME 0-500 ms
  - 10-40 cps 1.700-2.500 ms
  - 10-25 cps 2.800-5.000 ms
- [X] TRACE AMPLITUDE EQUALIZATION
- [ ] SINGLEFOLD DISPLAY
- [ ] VELOCITY ANALYSIS

FIELD DATA

RECORDING INST. TI 11,000, DFS III 48 TRACE
RECORDING FILTERS 8-62 cps
SPREAD CONFIGURATION - END ON 160-8250' OFFSET
GAIN INFORMATION - BINARY GAIN
ARRAY - 9 JUNE

1-80 IN³ 12-40 6-20 IN³
6-40 IN³ 3-10 IN³

RECORDED AND PROCESSED BY

digicon inc.
HOUSTON, TEXAS

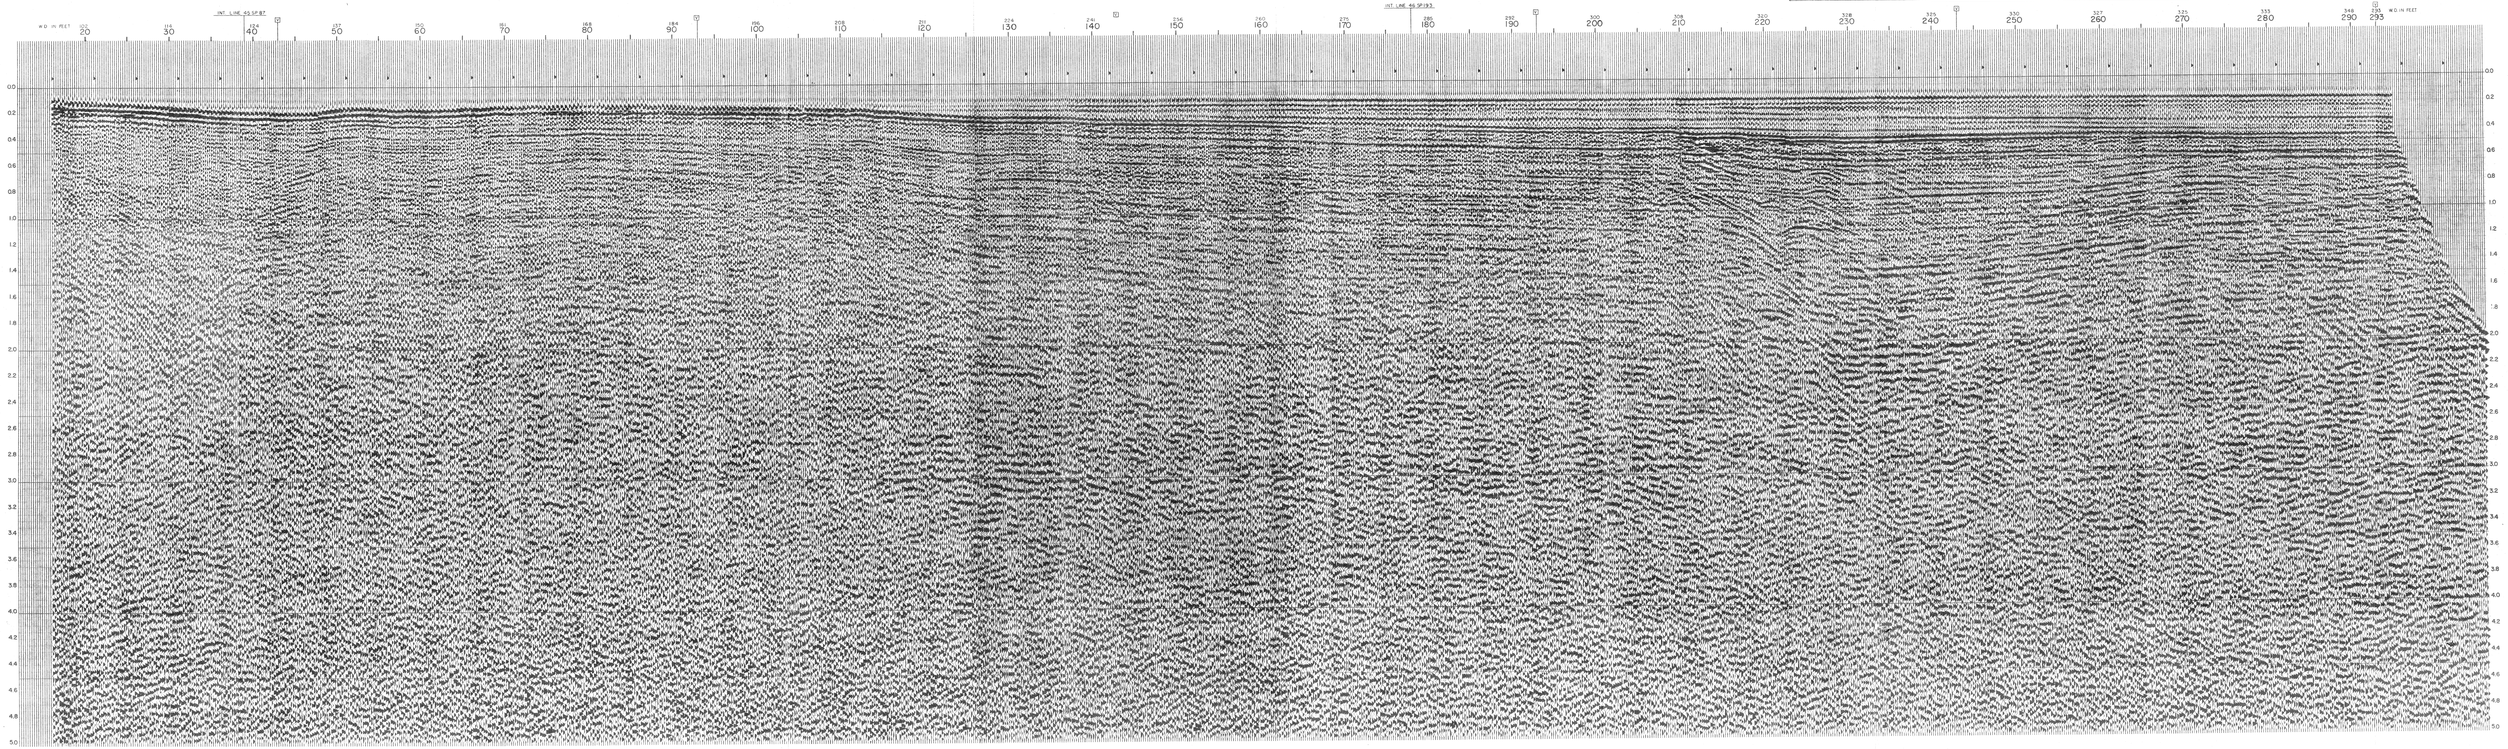

MTI
LINE 47
SP 293-15
24 FOLD CDPSUM