


SICILY GROUP-AMOCO  
 LINE ZC-328  
 SP 150-2

1 Km

SOUTHEAST

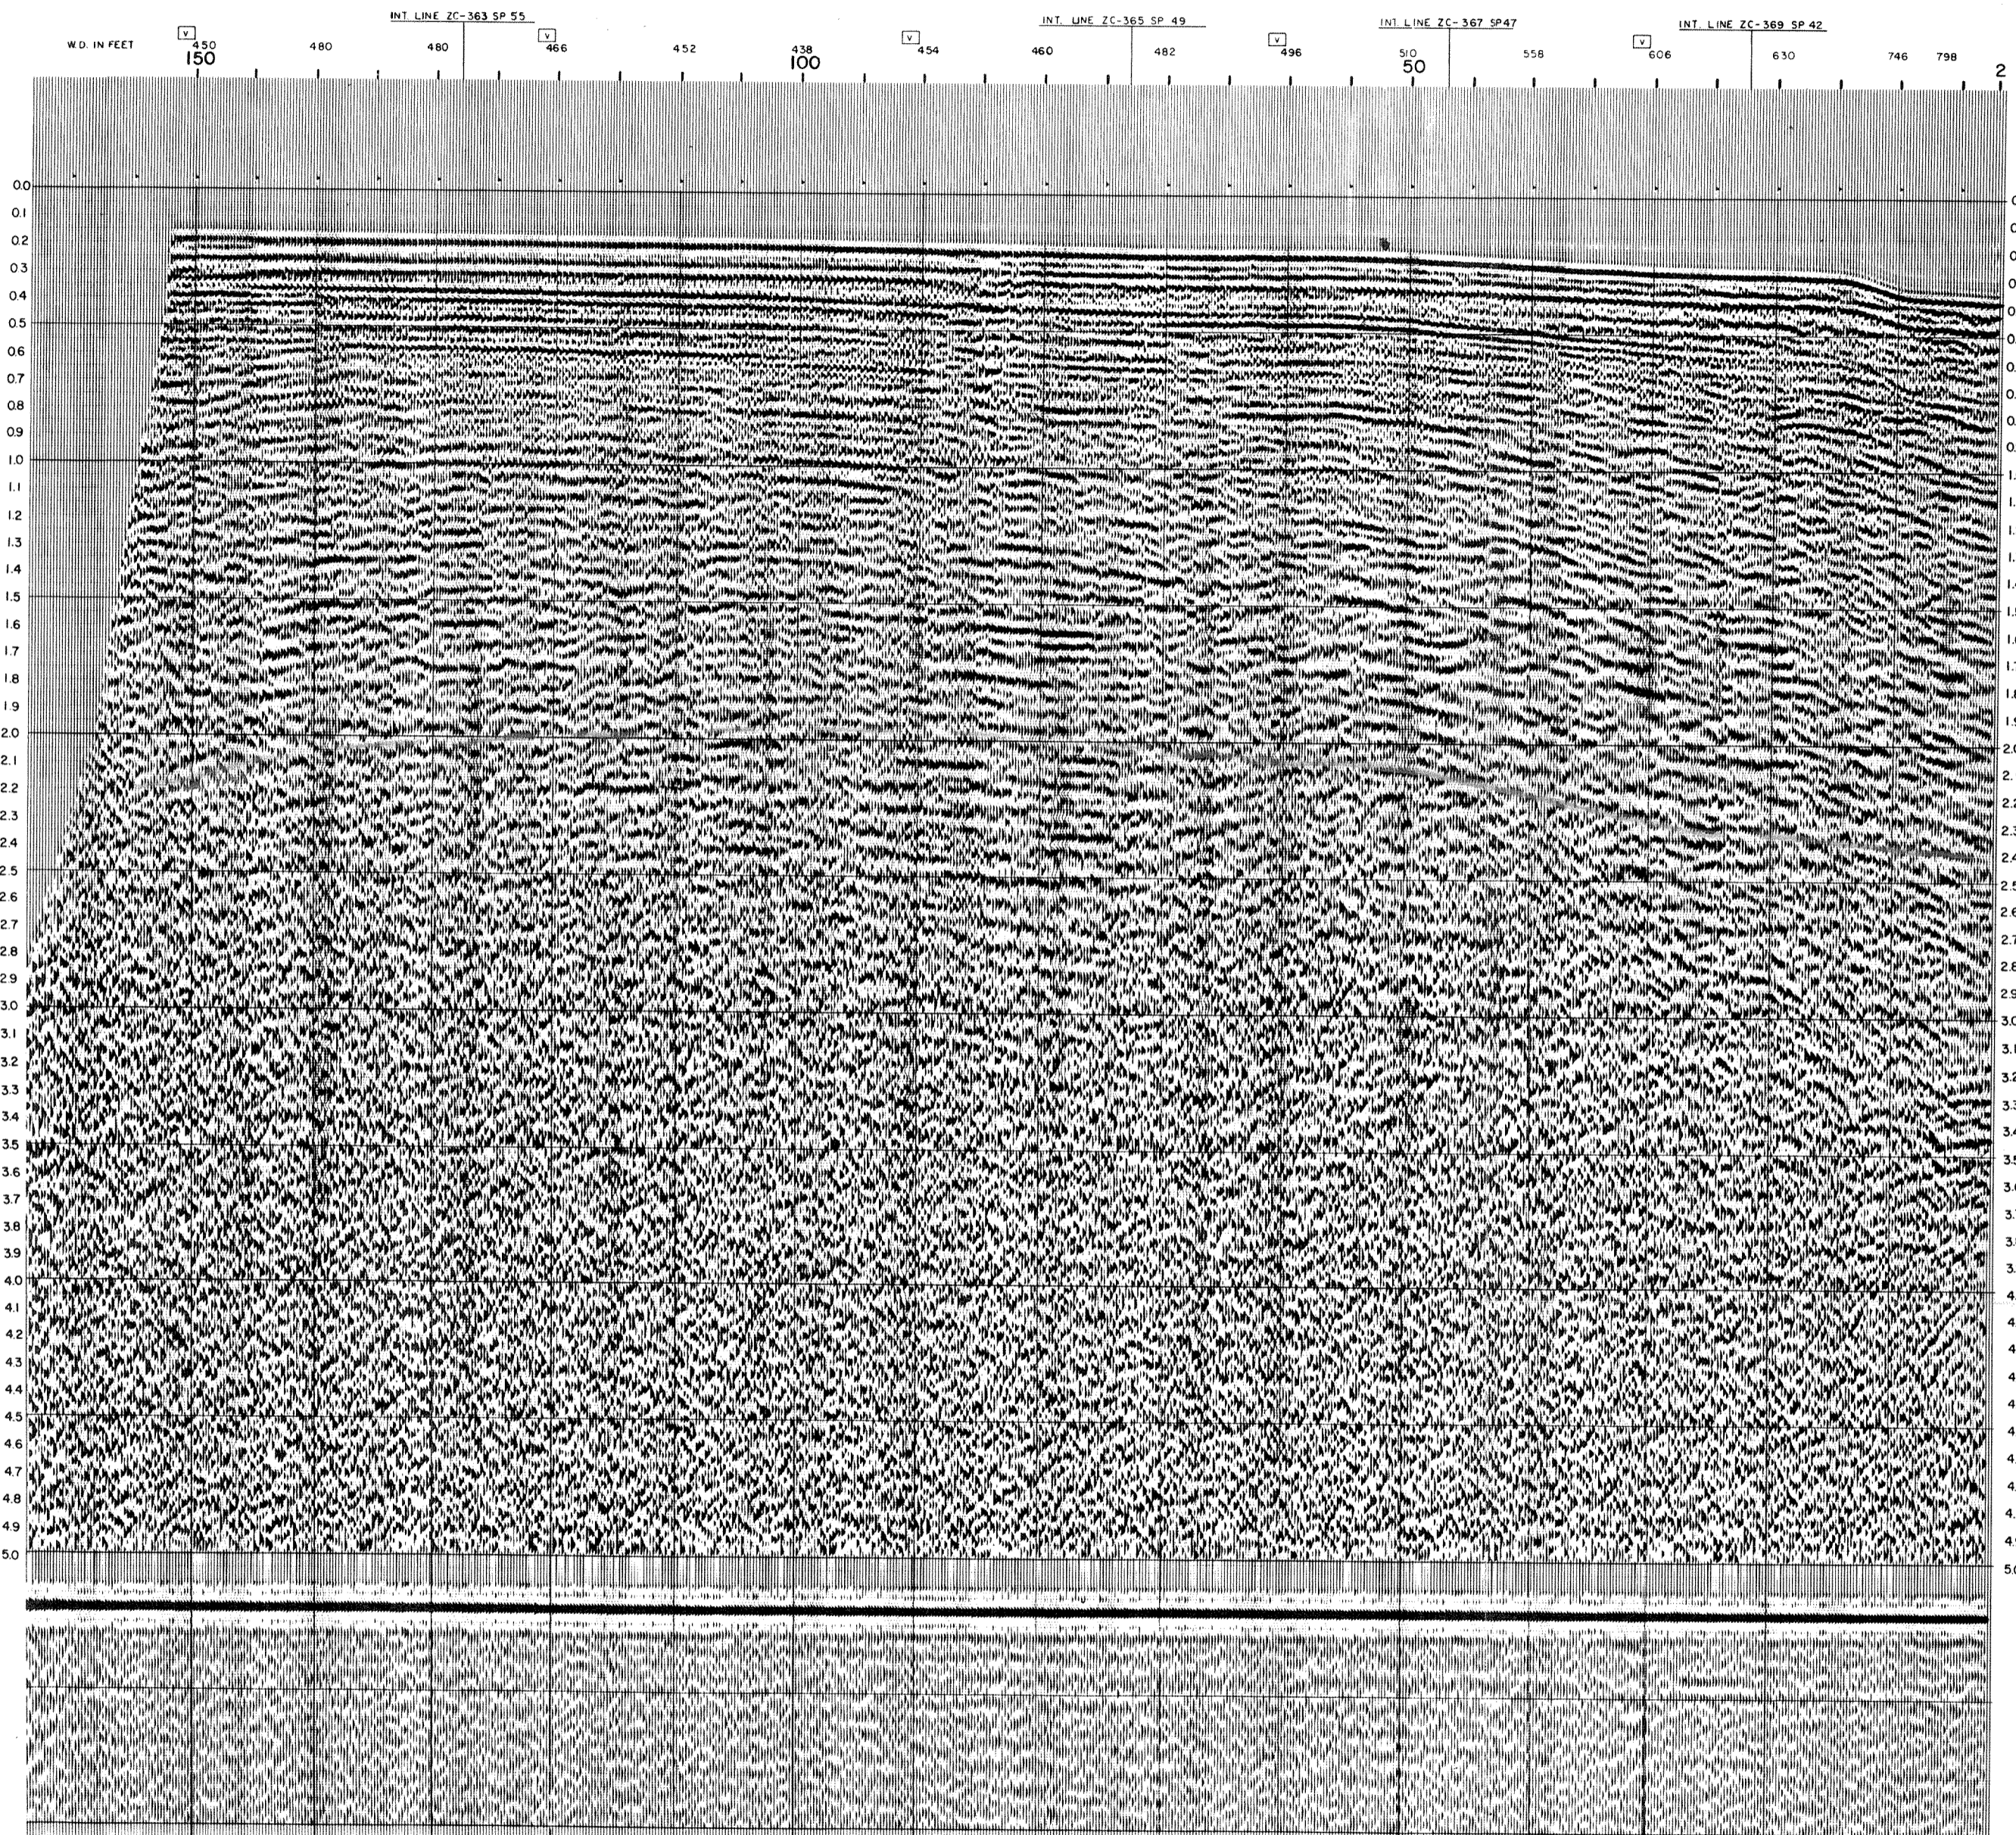

LINE ZC-328

SHOTPOINTS 150-2  
 PROJECT SICILY GROUP-AMOCO

FIELD DATA	
RECORDING INSTRUMENTS	T.I. DFS III
GAIN INFORMATION	BINARY
RECORDING FILTERS	8-18/62 Hz
SAMPLE RATE	4 MS
GROUP INTERVAL	50 METERS
NO. GROUPS	48
NEAR GROUP	205.8 METERS
SHOTPOINT INTERVAL	100 METERS
POP INTERVAL	25 METERS
ENERGY SOURCE	AIRGUN
RECORDED BY	DIGICON INC.
DATE SHOT	8-17-72
PROCESSING	
1. EXPONENTIAL GAIN RATE	4 db/Sec. GATE 0-4.000 Sec.
2. VERTICAL STACK	
6. NORMAL MOVEOUT	INPUT FUNCTION
7. DECON BEFORE STACK	
S.P.	150-2 No. FILTERS 1 WHITE NOISE 1%
FILTER LENGTH	2.00 ms
DESIGN GATES NEAR OFFSET	1.000-4.900 MS
DESIGN GATES FAR OFFSET	3.000-4.900 MS
3. SINGLE FOLD DISPLAY	8. COMMON DEPTH POINT SLIM 24 FOLD
5. VELOCITY ANALYSIS	9. DECON AFTER STACK
RESIDUAL NORMAL MOVEOUT	11. TRACE AMPLITUDE EQUALIZATION
4. COMMON DEPTH POINT GATHER	12. AUTO-CORRELATION
S.P.	150-2 No. FILTERS 1 WHITE NOISE 1%
FILTER LENGTH	2.00 ms
DESIGN GATES FAR OFFSET	500-4.900 MS
DESIGN GATES NEAR OFFSET	500-4.900 MS
10. DIGITAL FILTER	No. FILTERS 3
BAND PASS 10	40 Hz TIME 0-500 Sec.
10	30 Hz TIME 1.200 Sec.
5	25 Hz TIME 2.000-5.000 Sec.

PROCESSED BY  
 digicon inc.  
 HOUSTON, TEXAS

